

Lift 06

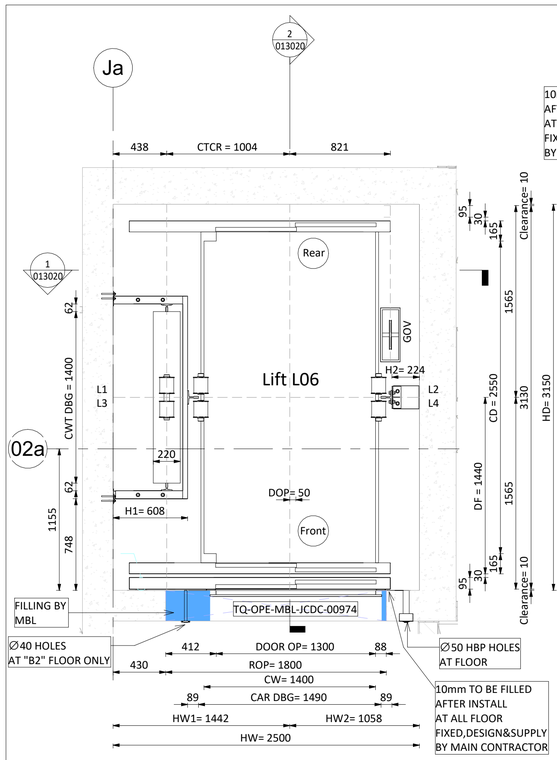


1 Hoist Way Plan At "B2" Floor (Front) - ELEV-L6

1 : 25

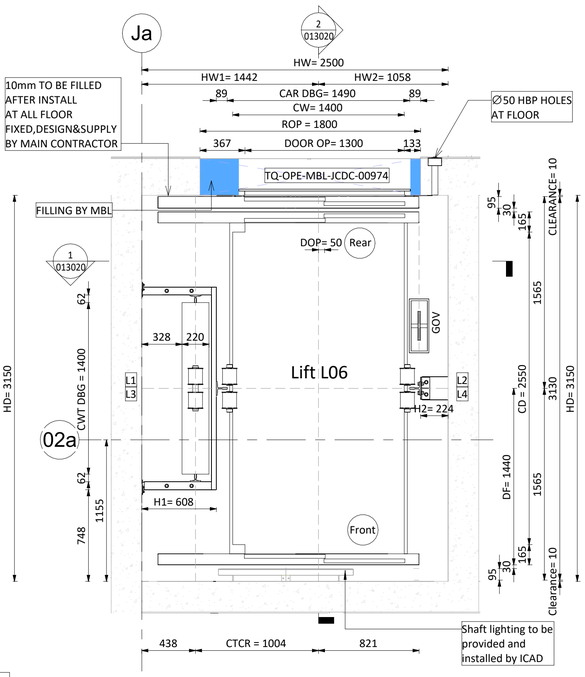


2 Hoist Way Plan At "G" Floor (Rear) - ELEV-L6

1 : 25

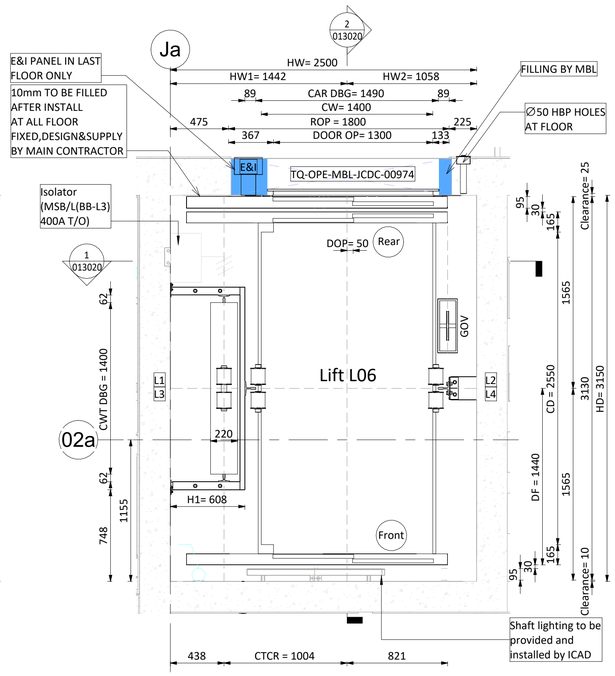


3 Hoist Way Plan At "1" Floor (Rear) - ELEV-L6

1 : 25

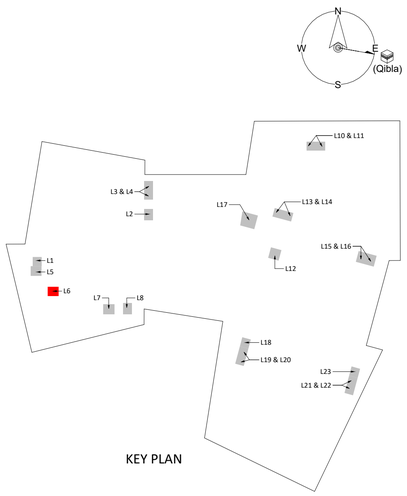

KEY PLAN



KEY PLAN

GENERAL NOTES: ALL LEVELS SHOWN ON THE DRAWING ARE CHART DATUM LEVELS PROJECT LEVEL+0.000 = +3.700 CHART DATUM.

ELEV-L6 ELEVATOR GENERAL SPECIFICATIONS	
LIFT NUMBER	ELEV.L6
CABIN INTERNAL SIZE(WXDXH)	1400X2550X2600
CAPACITY	1800 Kg
CLEAR ENTRANCE	1300X2400
CONTROL	VVVF
CONTROL SYSTEM	SIMPLEX FULL COLLECTIVE
COUNTERWEIGHT SAFETY	NO
DOOR TYPE	TLD2
EMERGENCY EXITS	-
FRONT OPENING	1
HEAT RELEASE	1774Kcal/h
HOISTWAY SIZE(HWXHD)	2500X3150
LIFT NUMBER	ELV.L6
LIGHTING SUPPLY	220V 60HZ
MIN.FLOOR HEIGHT	3000
NO. OF FLOOR	4
NO. OF OPENINGS	3
NO. OF UNITS	1
NON-STOP FLOORS	1
NON-STOP FLOORS NAMES	B1
NUMBER OF PASSENGERS	24P
OVERHEAD	6200mm
PIT DEPTH	1650mm
POWER SUPPLY	380V 3P 60HZ
PRODUCT NO.	GeN2 MRL
RATED CURRENT(A)	31.4
REAR OPENING	2
ROPING	2:1
SPEED(m/s)	1.00
START CURRENT(A)	34.4
SYSTEM POWER(KW)	16.6
TRAVEL	14325mm
USE	F&B LIFT

REACTIONS FORCE (KN)			
Car side rail	CWT guide rail	Pit reaction	
R= 86	R= 25	U= 174	
R1= 3.84	R1= 1.65	V= 137	
R2= 2.67	R2= 0.26		

LEGEND	
HW	HOIST WAY WIDTH
HD	HOIST WAY DEPTH
CRH	CAR ROUGH HEIGHT
DOOR OP	DOOR OPENING
ROP	ROUGH OPENING
CW	CAR WIDTH
CD	CAR DEPTH
CH	CAR HEIGHT
DBG	DISTANCE BETWEEN GUARDRAIL
CWT	COUNTERWEIGHT
E&I PANEL	EMERGENCY & INSPECTION PANEL
G.O.V	CAR GOVERNOR
COP	CAR OPERATING PANEL
HBP	HALL POSITION INDICATOR

NOTE No.:
FRONT WALLS,FINISHES & ARCHITRAVES TO BE BUILT (BY CLIENT) AFTER THE INSTALLATION OF THE (LANDING) EXTERNAL DOORS.

IMPORTANT NOTE FOR MAIN CONTRACTOR.
FREEDOM OF ACCESS MUST BE AVAILABLE FOR POINT OF ENTRY INTO THE BUILDING UP TO THE ELEVATOR HOIST WAY AND THE FRONT WALLS OF THE HOIST WAY AT MAIN FLOOR TO BE LEFT OPEN FOR FULL WIDTH AND HEIGHT TO PERMIT ENTRY OF OUR EQUIPMENT.

DRAWING / DOCUMENT REFERENCE

NO.	NUMBER	TITLE	REV.
01	L-06	JOH-HLA-S4-01-056-XXX-01-DR-AR-011110	F00
02		JOH-BHC-S4-01-056-XXX-XX-DR-VT-015001	
03		JOH-BHC-S4-01-056-XXX-XX-DR-VT-010001	
04		JOH-BHC-S4-01-056-005-ZZ-DR-VT-013001	
05		JOH-BHC-S4-01-056-005-ZZ-DR-VT-011001	
06		TQ-OPE-MBL-JCDC-00952 (OPERA ALL LIFT TOP SLAB)	
07		TQ-OPE-MBL-JCDC-00222 (LIFT SHAFT PIT LEVELS)	
08		JCD-OPE-MBL-MR-003-NMR-601-03	
09		JCD-OPE-MBL-MR-003-NMR-602-01	
10		TQ-OPE-MBL-JCDC-00974 (CONFIRMATION OF LIFT DOOR FINISHES)	

REVIEWED BY DISCIPLINE	SIGNATURE	DATE
ARCHITECTURAL	AN	2026-07-15
STRUCTURAL	KC	2026-07-15
MECHANICAL	BM	2026-07-15
PLUMBING	BM	2026-07-15
ELECTRICAL	BM	2026-07-15
ICT	BM	2026-07-15
ADDITIONAL DISCIPLINES TO BE ADDED AS REQUIRED		

REV	DATE	BY	DESCRIPTION	CHK	APD
S01	08-JULY-2026	AK	Shop Drawing	SS	AB
S00	08-JULY-2026	AK	Issued for Approval	SS	AB

DRAWING STATUS: CONSTRUCTION SHOPDRAWING

CLIENT: Jeddah Central Development Co.

LEAD DESIGN CONSULTANTS: Henning Larsen

LEAD ENGINEERING CONSULTANT: BURO HAPPOLD

PROJECT SUPERVISION CONSULTANT: SCEC – K&A Khatib & Alami

GENERAL CONTRACTOR: MBL

REVIEWER: dar

SUB CONTRACTOR: OTIS ELEVATOR COMPANY (SAUDI ARABIA) LIMITED

PROJECT: JEDDAH OPERA HOUSE

TITLE: OPERA BUILDING
VERTICAL TRANSPORTATION
PART 001
PLANS - LIFT SHAFT (L06)

SCALE @ A1:	CHECKED:	APPROVED:
As indicated	SS	AB

PROJECT No:	DESIGNED:	DRAWN:	DATE:
440014	AK	PR	08-JULY-2026

DRAWING No: JOH-OTS-S5-01-056-001-ZZ-SD-VT-011020 REV: S01

MODEL FILE REF: JOH-OTS-S5-01-056-XXX-ZZ-M3-VT-010001

© JCDC

SCEC – K&A Reviewed
Civil
Arch.
Elec.
ELV.
Mech.
Acoustic

SCEC – K&A Reviewed
KHATIB & ALAMI
SAUDI CONSOLIDATED ENGINEERING COMPANY
Code B – Approved with Comments (Do not Resubmit)


K&A COMMENTS


COMPLY WITH CRS COMMENTS

Disclaimer :K&A Khatib Alami – Saudi Consolidated Engineering review and/or approval does not relieve the Contractor from obligation to adhere to Contract Documents. The Contractor remains fully responsible for the accuracy, completeness, coordination, and compliance of all submitted documents and works.

dar Checked and Reviewed

Refer to Attached CRS:
SD-OPE-MBL-JCDC-01854-00-k&A comments_2-version-(0_00) (lift 6)




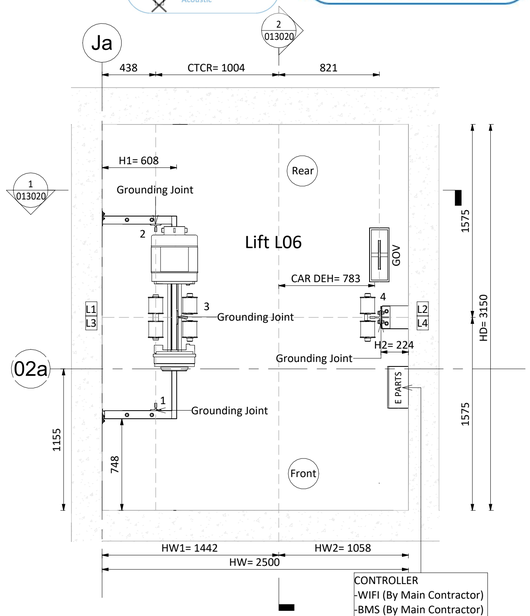

4 Machine Plan Level - ELEV-L6

1 : 25


CONTROLLER
-WIFI (By Main Contractor)
-BMS (By Main Contractor)
-EMS (By Main Contractor)
-CCTV (By Main Contractor)
-Fire (By Main Contractor)
-Cabin BGM Speakers
(By Main Contractor)

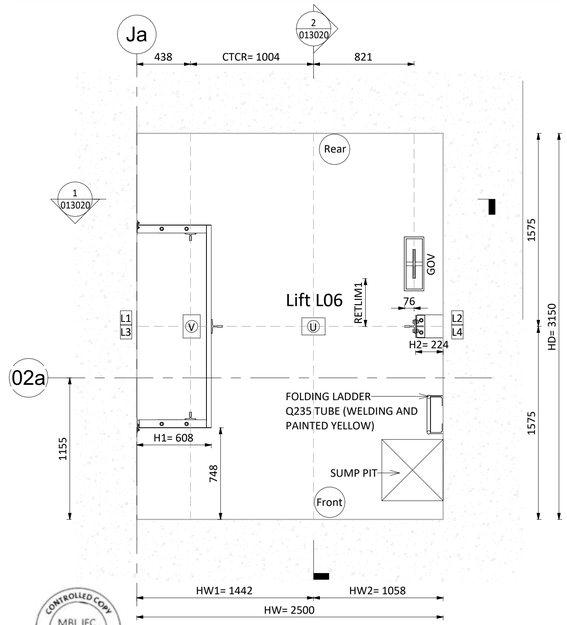

CONTROLLED COPY
MBL IFC
JEDDAH OPERA HOUSE PROJECT
QA/QC Department
MBL QAM
Engr. Mudassar Altaf

5 Top Hoist Way Pit Plan - ELEV-L6


1 : 25

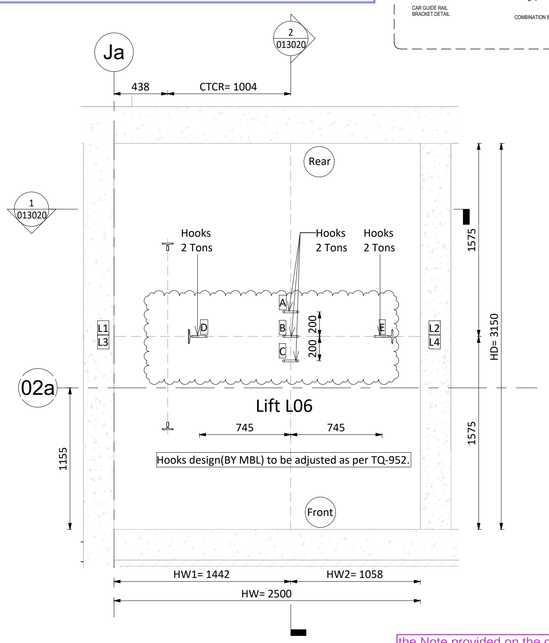

6 Top Hoist Way Hook Plan - ELEV-L6


1 : 25

the Note provided on the drawing is rejected and the word (by client)shall be replaces to (by main contractor):

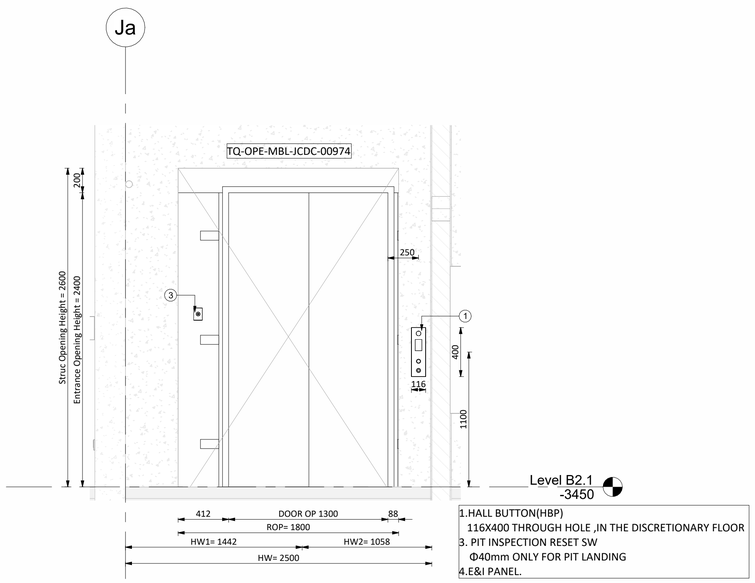


1.HALL BUTTON(HBP)
116X400 THROUGH HOLE ,IN THE DISCRETIONARY FLOOR
3. PIT INSPECTION RESET SW
Φ40mm ONLY FOR PIT LANDING
4.E&I PANEL.


1 Door Elevation At "B2" Floor (FRONT) - ELEV-L6
1 : 25

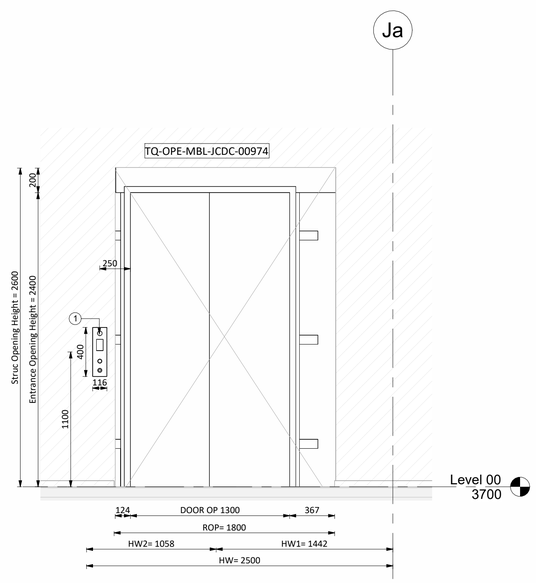


2 Door Elevation At "G" Floor (REAR) - ELEV-L6
1 : 25

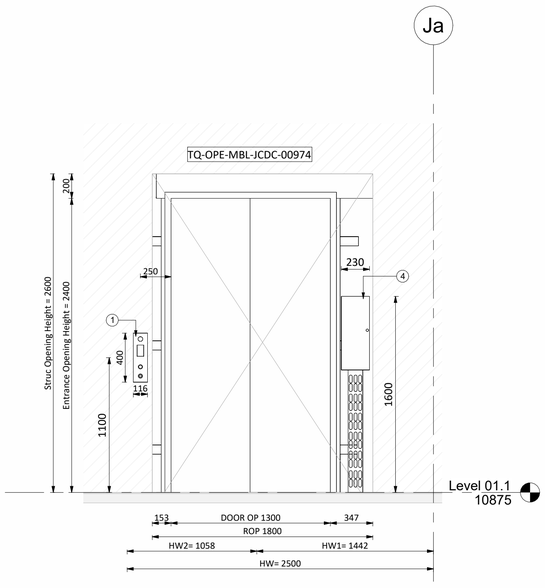


3 Door Elevation At "1" Floor (REAR) - ELEV-L6
1 : 25

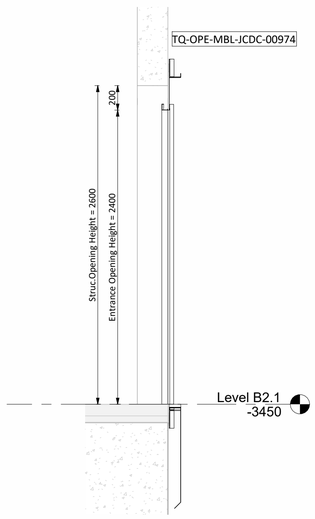

4 Cross-Section View A-A - ELEV-L6
1 : 25

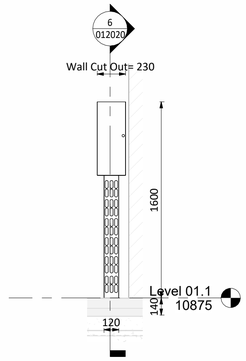



5 E&I SPOT DETAIL - ELEV-L6
1 : 25

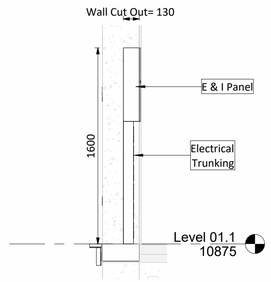

6 Cross-Section View B-B - ELEV-L2
1 : 25

Simplex Units

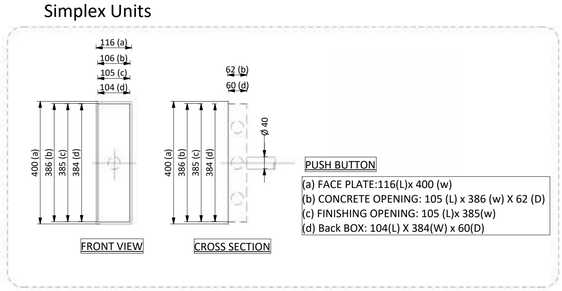

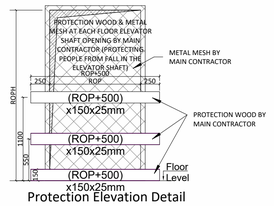

Protection Elevation Detail
At Each Elevator Shaft Opening

LEGEND	
HW	HOIST WAY WIDTH
HD	HOIST WAY DEPTH
CRH	CAR ROUGH HEIGHT
DOOR OP	DOOR OPENING
ROP	ROUGH OPENING
CW	CAR WIDTH
CD	CAR DEPTH
CH	CAR HEIGHT
DBG	DISTANCE BETWEEN GUARDRAIL
CWT	COUNTERWEIGHT
E&I PANEL	EMERGENCY & INSPECTION PANEL
G.O.V	CAR GOVERNOR
COP	CAR OPERATING PANEL
HBP	HALL BUTTON POSITION INDICATOR

CONTROLLED COPY
MBL IFC
JEDDAH OPERA HOUSE PROJECT
QA/QC Department
MBL QAM
Engr. Mudassar Altaf

K&A Comments :

call button centerline height of 1100 mm is ok subject that the installation remains fully compliant with EN 81-70 and the applicable accessibility requirements

CCOMPLY WITH CRS COMMENTS


Disclaimer :K&A Khatib Alami – Saudi Consolidated Engineering review and/or approval does not relieve the Contractor from obligation to adhere to Contract Documents. The Contractor remains fully responsible for the accuracy, completeness, coordination, and compliance of all submitted documents and works.

SCEC – K&A Reviewed
Civil
Arch.
Elec.
ELV.
Mech.
Acoustic

SCEC – K&A Reviewed
Code B – Approved with Comments
(Do not Resubmit)

Refer to Attached CRS:
SD-OPE-MBL-JCDC-01854-00-k&A comments_2-version-(0_00) (lift 6)

dar
Checked and Reviewed



KEY PLAN

GENERAL NOTES: ALL LEVELS SHOWN ON THE DRAWING ARE CHART DATUM LEVELS PROJECT LEVEL+0.000 = +3.700 CHART DATUM.

DRAWING / DOCUMENT REFERENCE

NO.	NUMBER	TITLE	REV.
01	L-06	JOH-HLA-S4-01-056-XXX-01-DR-AR-011110	F00
02		JOH-BHC-S4-01-056-XXX-XX-DR-VT-015001	
03		JOH-BHC-S4-01-056-XXX-XX-DR-VT-010001	
04		JOH-BHC-S4-01-056-005-ZZ-DR-VT-013001	
05		JOH-BHC-S4-01-056-005-ZZ-DR-VT-011001	
06		TQ-OPE-MBL-JCDC-00952 (OPERA ALL LIFT TOP SLAB)	
07		TQ-OPE-MBL-JCDC-00222 (LIFT SHAFT PIT LEVELS)	
08		JCD-OPE-MBL-MR-003-NMR-601-03	
09		JCD-OPE-MBL-MR-003-NMR-602-01	
10		TQ-OPE-MBL-JCDC-00974 (CONFIRMATION OF LIFT DOOR FINISHES)	

REVIEWED BY DISCIPLINE	SIGNATURE	DATE
ARCHITECTURAL	AN	2026-07-15
STRUCTURAL	KC	2026-07-15
MECHANICAL	BM	2026-07-15
PLUMBING	BM	2026-07-15
ELECTRICAL	BM	2026-07-15
ICT	BM	2026-07-15
ADDITIONAL DISCIPLINES TO BE ADDED AS REQUIRED		

REV	DATE	BY	DESCRIPTION	CHK	APD
S01	08-JULY-2026	AK	Shop Drawing	SS	AB

DRAWING STATUS: CONSTRUCTION SHOPDRAWING

CLIENT: Jeddah Central Development Co.

LEAD DESIGN CONSULTANTS: Henning Larsen

LEAD ENGINEERING CONSULTANT: BURO HAPPOLD

PROJECT SUPERVISION CONSULTANT: K&A Khatib & Alami

GENERAL CONTRACTOR: MBL

REVIEWER: dar

SUB CONTRACTOR: OTIS ELEVATOR COMPANY SAUDI ARABIA LIMITED — OTIS

PROJECT: JEDDAH OPERA HOUSE

TITLE: OPERA BUILDING
VERTICAL TRANSPORTATION
PART 001
ELEVATIONS - LIFT SHAFT (L06)


SCALE @ A1:	CHECKED:	APPROVED:
As indicated	SS	AB

PROJECT No:	DESIGNED:	DRAWN:	DATE:
440014	AK	PR	08-JULY-2026

DRAWING No: JOH-OTS-S5-01-056-001-ZZ-SD-VT-012020 REV: S01


MODEL FILE REF: JOH-OTS-S5-01-056-XXX-ZZ-M3-VT-010001

© JCDC

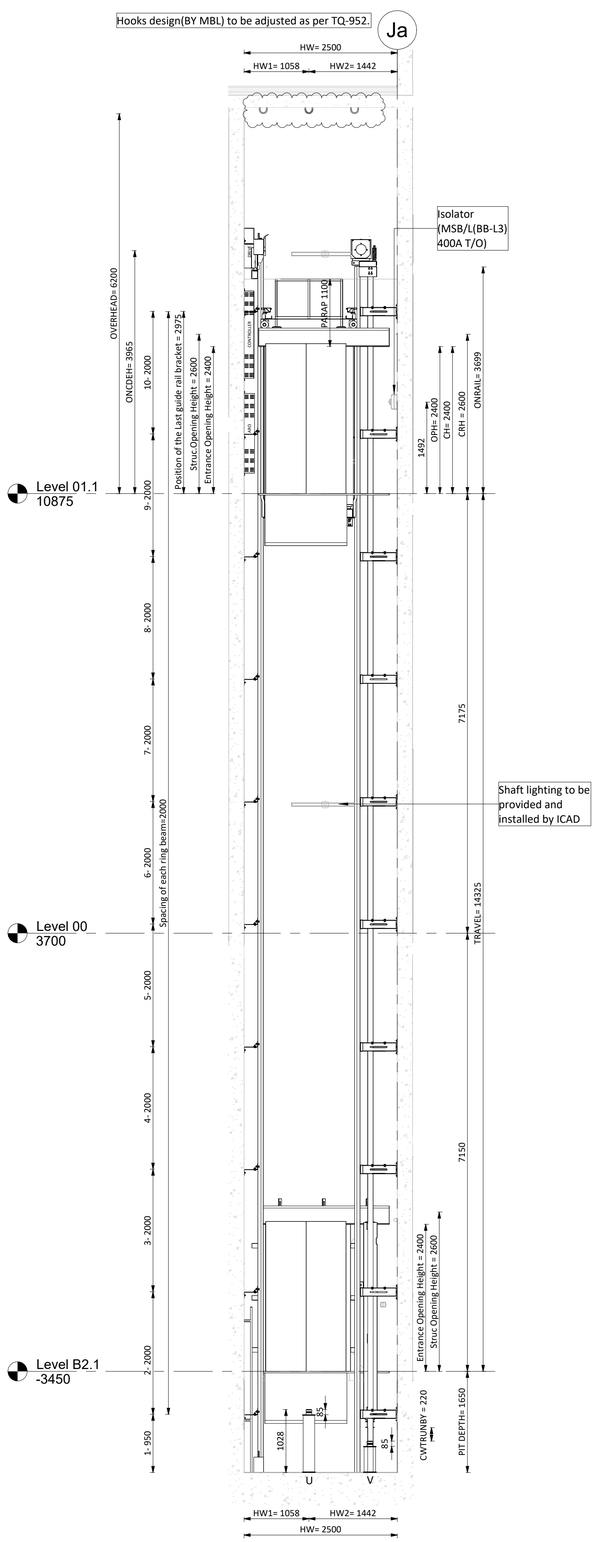


1 Section "A" - ELEV-L6

1 : 50

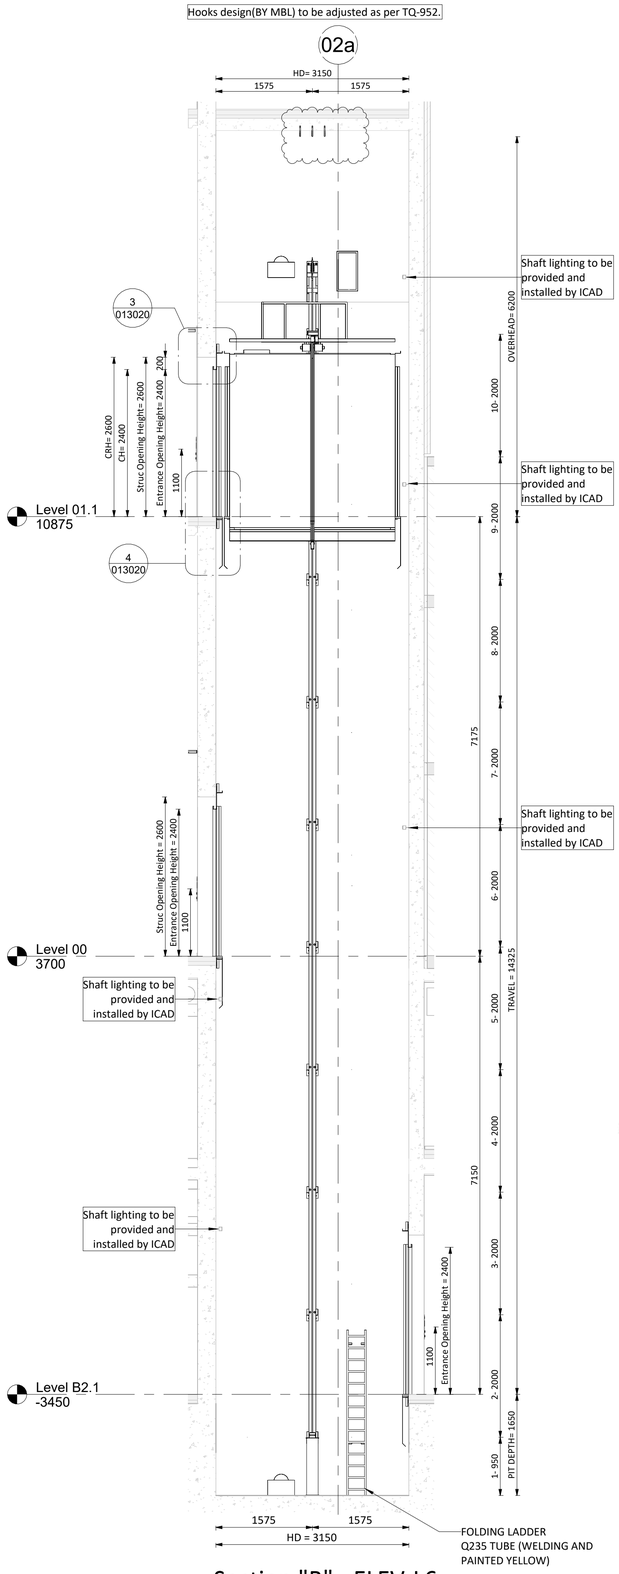


2 Section "B" - ELEV-L6

1 : 50

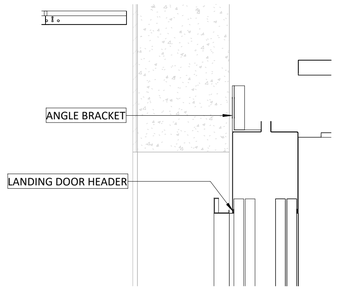

3 Landing Door Header Detail - ELEV-L6

1 : 10

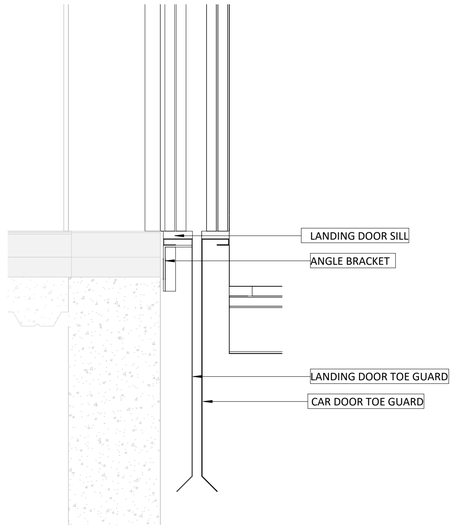

4 Landing Door Bottom Detail - ELEV-L6

1 : 10

CONTROLLED COPY
MBL IFC
QA/QC Department
MBL QAM
Engr. Mudassar Altaf

SCEC – K&A Reviewed
Code B – Approved with Comments
(Do not Resubmit)

K&A COMMENTS


COMPLY WITH CRS COMMENTS

Disclaimer :K&A Khatib Alami – Saudi Consolidated Engineering review and/or approval does not relieve the Contractor from obligation to adhere to Contract Documents. The Contractor remains fully responsible for the accuracy, completeness, coordination, and compliance of all submitted documents and works.

SCEC – K&A Reviewed
Civil
Arch.
Elec.
ELV.
Mech.
Acoustic

dar
Checked and Reviewed

Refer to Attached CRS:
SD-OPE-MBL-JCDC-01854-00-k&A comments_2-version-(0_00) (lift 6)



KEY PLAN

GENERAL NOTES: ALL LEVELS SHOWN ON THE DRAWING ARE CHART DATUM LEVELS PROJECT LEVEL+0.000 = +3.700 CHART DATUM.

DRAWING / DOCUMENT REFERENCE

NO.	NUMBER	TITLE	REV.
01	L-06	JOH-HLA-S4-01-056-XXX-01-DR-AR-011110	F00
02		JOH-BHC-S4-01-056-XXX-XX-DR-VT-015001	
03		JOH-BHC-S4-01-056-XXX-XX-DR-VT-010001	
04		JOH-BHC-S4-01-056-005-ZZ-DR-VT-013001	
05		JOH-BHC-S4-01-056-005-ZZ-DR-VT-011001	
06		TQ-OPE-MBL-JCDC-00952 (OPERA ALL LIFT TOP SLAB)	
07		TQ-OPE-MBL-JCDC-00222 (LIFT SHAFT PIT LEVELS)	
08		JCD-OPE-MBL-MR-003-NMR-601-03	
09		JCD-OPE-MBL-MR-003-NMR-602-01	
10		TQ-OPE-MBL-JCDC-00974 (CONFIRMATION OF LIFT DOOR FINISHES)	

REVIEWED BY DISCIPLINE	SIGNATURE	DATE
ARCHITECTURAL	AN	2026-07-15
STRUCTURAL	KC	2026-07-15
MECHANICAL	BM	2026-07-15
PLUMBING	BM	2026-07-15
ELECTRICAL	BM	2026-07-15
ICT	BM	2026-07-15
ADDITIONAL DISCIPLINES TO BE ADDED AS REQUIRED		

REV	DATE	BY	DESCRIPTION	CHK	APD
S01	08-JULY-2026	AK	Shop Drawing	SS	AB
S00	08-JULY-2026	AK	Issued for Approval	SS	AB

DRAWING STATUS: CONSTRUCTION SHOPDRAWING

CLIENT: شركة وسط جدة للتطوير Jeddah Central Development Co.

LEAD DESIGN CONSULTANTS: Henning Larsen

LEAD ENGINEERING CONSULTANT: BURO HAPPOLD

PROJECT SUPERVISION CONSULTANT: KHATIB & ALAMI

GENERAL CONTRACTOR: MBL

REVIEWER: dar

SUB CONTRACTOR: OTIS ELEVATOR COMPANY (SAUDI ARABIA) LIMITED — OTIS

PROJECT: JEDDAH OPERA HOUSE

TITLE: OPERA BUILDING
VERTICAL TRANSPORTATION
PART 001
SECTIONS - LIFT SHAFT (L06)

SCALE @ A1:	CHECKED:		APPROVED:
As indicated	SS		AB
PROJECT No:	DESIGNED:	DRAWN:	DATE:
440014	AK	PR	08-JULY-2026

DRAWING No: JOH-OTS-S5-01-056-001-ZZ-SD-VT-013020 REV: S01

MODEL FILE REF: JOH-OTS-S5-01-056-XXX-ZZ-M3-VT-010001

© JCDC