

Lift 15,16

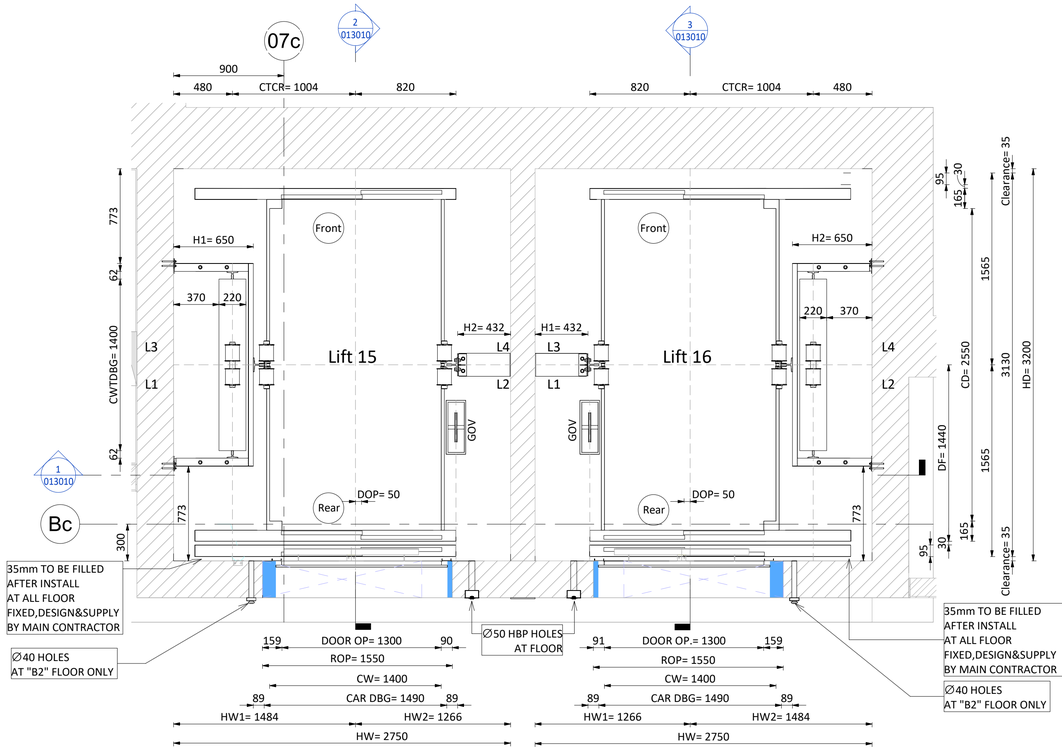


1 Hoist Way Plan At "B2" Floor "REAR" - ELEV-L15 & L16

1 : 25

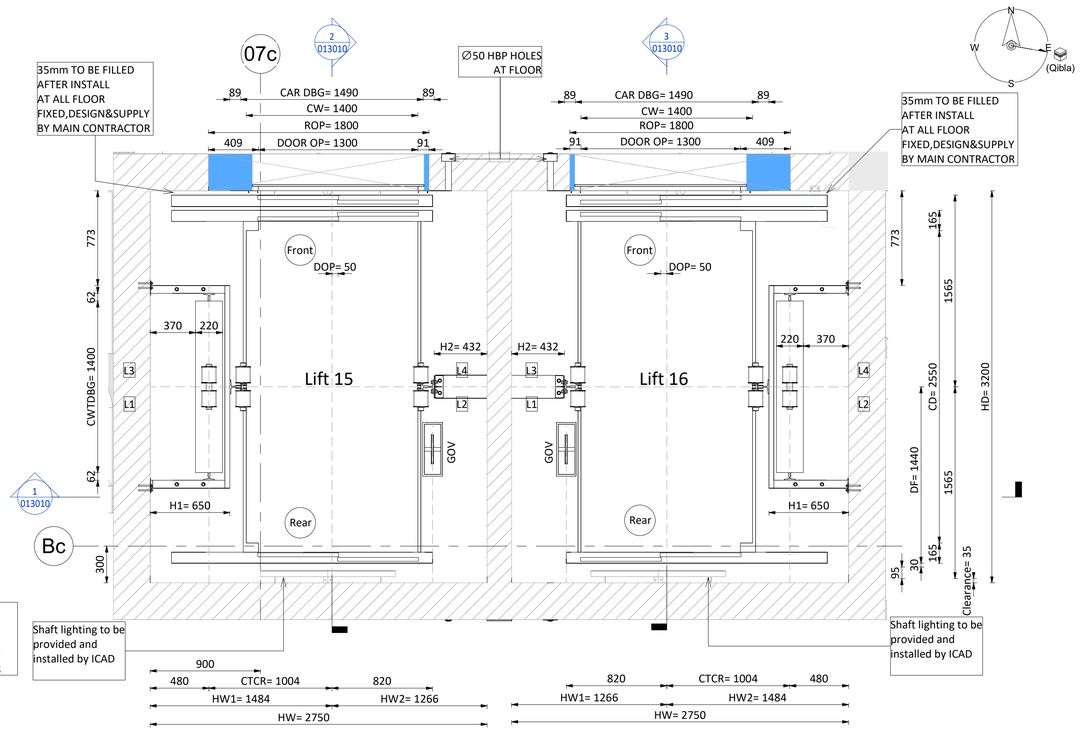


2 Hoist Way Plan At "G & 1" Floor "FRONT" - ELEV-L15 & L16

1 : 25

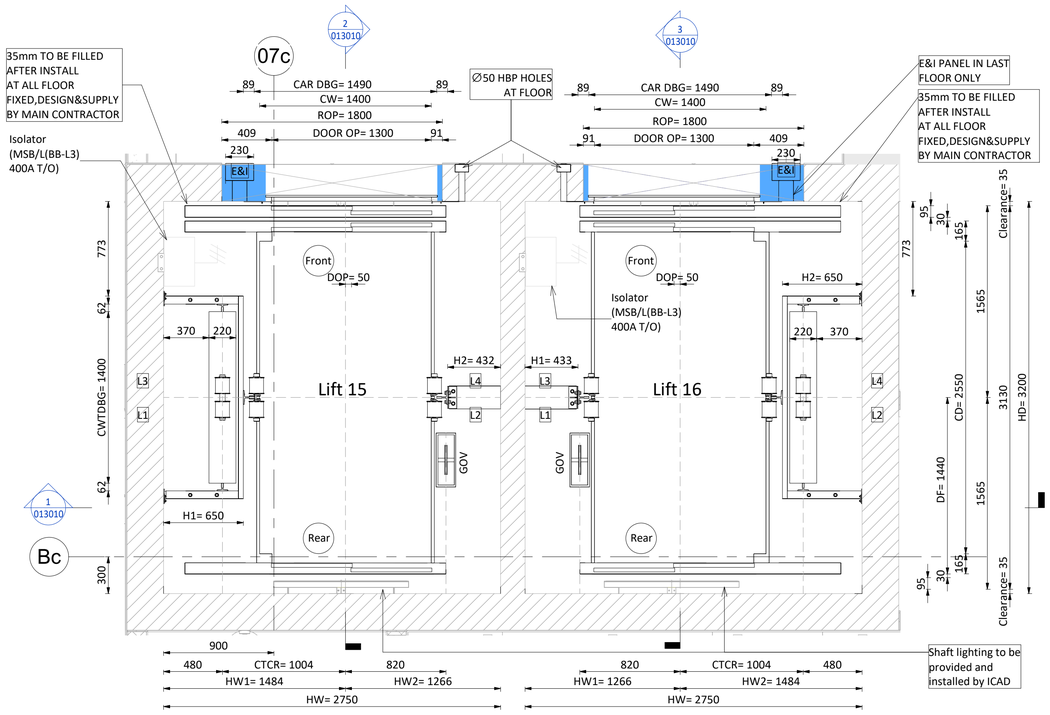

3 Hoist Way Plan At "2" Floor "FRONT" - ELEV-L15 & L16

1 : 25

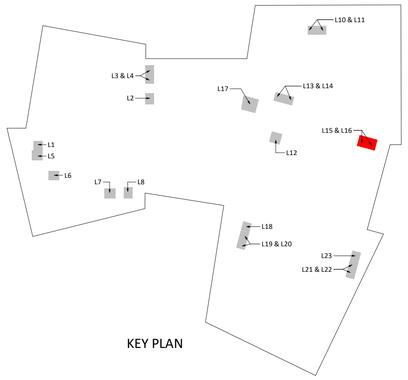

KEY PLAN


SCEC – K&A Reviewed

Civil	Arch.	Elec.	ELV.	Mech.	Acoustic
☒	☒	☒	☐	☒	☒

SCEC – K&A Reviewed

Code B – Approved with Comments (Do not Resubmit)

CONTROLLED COPY
MBL IFC
JEDDAH OPERA HOUSE PROJECT
QA/QC Department
MBL QAM
Engr. Mudassar Altaf

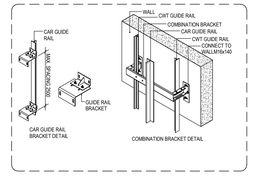


ELEV-L15 & 16 ELEVATOR GENERAL SPECIFICATIONS

LIFT NUMBER	ELV.L15 &L16
CABIN INTERNAL SIZE(WXDXH)	1400X2550X2600
CAPACITY	1800Kg
CLEAR ENTRANCE	1300X2400
CONTROL	VVVF
CONTROL SYSTEM	SIMPLEX FULL COLLECTIVE
COUNTERWEIGHT SAFETY	NO
DOOR TYPE	TLD2
EMERGENCY EXITS	-
FRONT OPENING	3
HEAT RELEASE	1774Kcal/h
HOISTWAY SIZE(HWXHD)	2750X3200
LIFT NUMBER	ELV.L15 & 16
LIGHTING SUPPLY	220V 60HZ
MIN.FLOOR HEIGHT	-
NO. OF FLOOR	5
NO. OF OPENINGS	4
NO. OF UNITS	2
NON-STOP FLOORS	1
NON-STOP FLOORS NAMES	B1
NUMBER OF PASSENGERS	24P
OVERHEAD	5300mm
PIT DEPTH	1600mm
PRODUCT NO.	GeN2 MRL
RATED CURRENT(A)	31.4
REAR OPENING	1
ROPING	2:1
SPEED(m/s)	1.00
START CURRENT(A)	34.4
SYSTEM POWER(KW)	16.6
TRAVEL	16625mm
USE	PASSENGER LIFT

REACTIONS FORCE (KN)

Car side rail		CWT guide rail		Pit reaction	
R=	86	R=	25	U=	174
R1=	3.84	R1=	1.65	V=	137
R2=	2.67	R2=	0.26		




LEGEND

HW	HOIST WAY WIDTH
HD	HOIST WAY DEPTH
CRH	CAR ROUGH HEIGHT
DOOR OP	DOOR OPENING
ROP	ROUGH OPENING
CW	CAR WIDTH
CD	CAR DEPTH
CH	CAR HEIGHT
DBG	DISTANCE BETWEEN GUARDRAIL
CWT	COUNTERWEIGHT
E&I PANEL	EMERGENCY & INSPECTION PANEL
G.O.V	CAR GOVERNOR
COP	CAR OPERATING PANEL
HBP	HALL POSITION INDICATOR

NOTE No.:
FRONT WALLS,FINISHES & ARCHITRAVES
TO BE BUILT (BY CLIENT) AFTER THE INSTALLATION OF
THE (LANDING) EXTERNAL DOORS.

IMPORTANT NOTE FOR MAIN CONTRACTOR.
FREEDOM OF ACCESS MUST BE AVAILABLE FOR POINT OF ENTRY INTO THE BUILDING UP TO THE ELEVATOR HOIST WAY AND THE FRONT WALLS OF THE HOIST WAY AT MAIN FLOOR TO BE LEFT OPEN FOR FULL WIDTH AND HEIGHT TO PERMIT ENTRY OF OUR EQUIPMENT.



KEY PLAN

GENERAL NOTES: ALL LEVELS SHOWN ON THE DRAWING ARE CHART DATUM LEVELS PROJECT LEVEL+0.000 = +3.700 CHART DATUM.

DRAWING / DOCUMENT REFERENCE

NO.	NUMBER	TITLE	REV.
01	L-15 & L-16	JOH-HLA-S4-01-056-XXX-02-DR-AR-011120	F00
02		JOH-BHC-S4-01-056-XXX-XX-DR-VT-015001	
03		JOH-BHC-S4-01-056-XXX-XX-DR-VT-010001	
04		JOH-BHC-S4-01-056-005-ZZ-DR-VT-013001	
05		JOH-BHC-S4-01-056-005-ZZ-DR-VT-011001	
06		TQ-OPE-MBL-JCDC-00952	
07		TQ-OPE-MBL-JCDC-00222	
08		TQ-OPE-MBL-JCDC-01052	
09		JCD-OPE-MBL-MR-003-NMR-601-03	
10		JCD-OPE-MBL-MR-003-NMR-602-01	

REVIEWED BY DISCIPLINE	SIGNATURE	DATE
ARCHITECTURAL	[illegible]	[illegible]
STRUCTURAL	[illegible]	[illegible]
MECHANICAL	[illegible]	[illegible]
PLUMBING	[illegible]	[illegible]
ELECTRICAL	[illegible]	[illegible]
ICT	[illegible]	[illegible]
ADDITIONAL DISCIPLINES TO BE ADDED AS REQUIRED		

REV	DATE	BY	DESCRIPTION	CHK	APD
S01	20-APR-2026	AK	Shop Drawing	SS	AB
S00	26-APR-2026	AK	Issued for Approval	SS	AB

DRAWING STATUS:
CONSTRUCTION SHOPDRAWING

CLIENT: شركة وسط جدة للتطوير Jeddah Central Development Co.

LEAD DESIGN CONSULTANTS: Henning Larsen

LEAD ENGINEERING CONSULTANT: BURO HAPPOLD

PROJECT SUPERVISION CONSULTANT: KHATIB & ALAMI

GENERAL CONTRACTOR: MBL

REVIEWER: dar

SUB CONTRACTOR: OTIS ELEVATOR COMPANY SAUDI ARABIA LIMITED

PROJECT: JEDDAH OPERA HOUSE


TITLE:
OPERA BUILDING
VERTICAL TRANSPORTATION
PART 004
PLANS - LIFT SHAFT SHEET 01 OF 02 (L15 & L16)

SCALE @ A1:	CHECKED:	APPROVED:
1:25	SS	AB
PROJECT No: 440014	DESIGNED: AK / DRAWN: PR	DATE: 20-APR-2026

DRAWING No: JOH-OTS-S5-01-056-004-ZZ-SD-VT-011010 REV: S01


MODEL FILE REF: JOH-OTS-S5-01-056-XXX-ZZ-M3-VT-010001

© JCDC

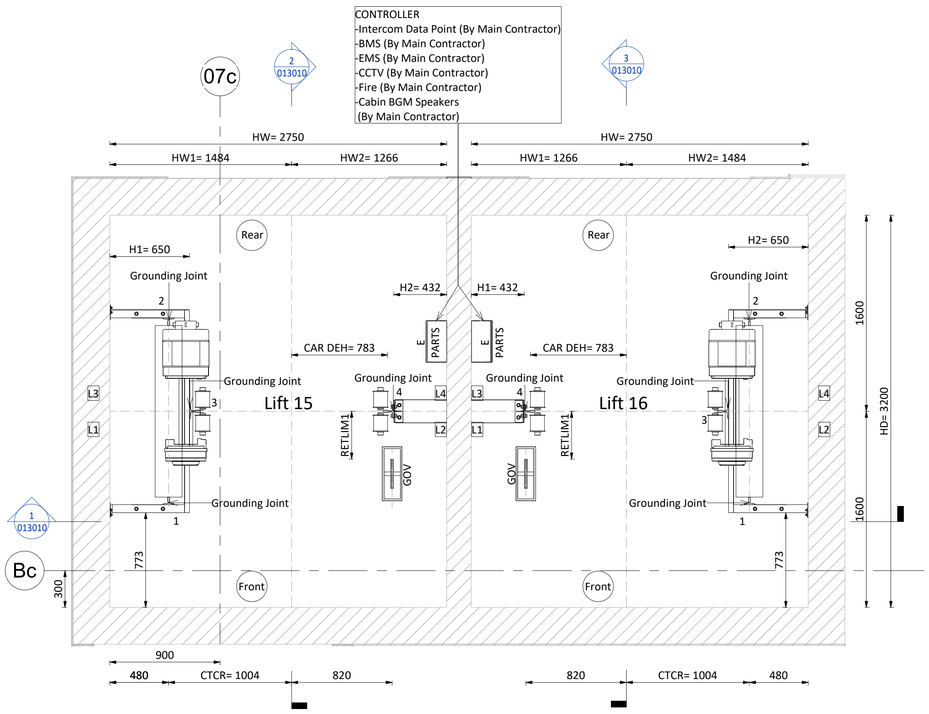


1 Machine Plan Level - ELEV-L15 & L16

1 : 25

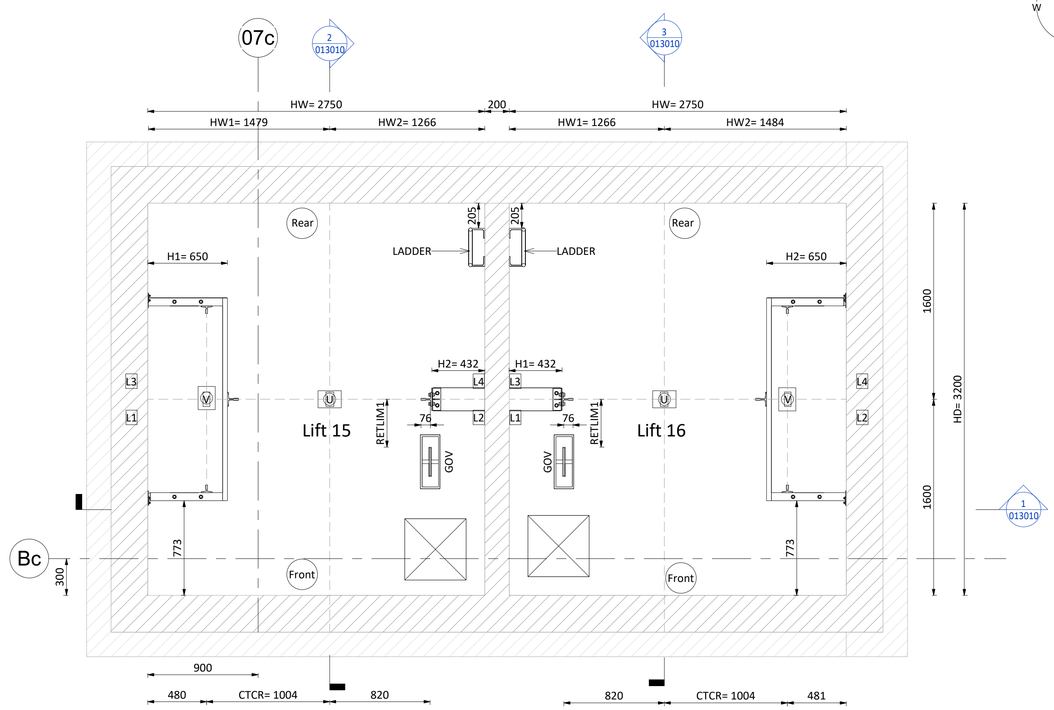

2 Hoist Way Pit Plan - ELEV-L15 & L16

1 : 25

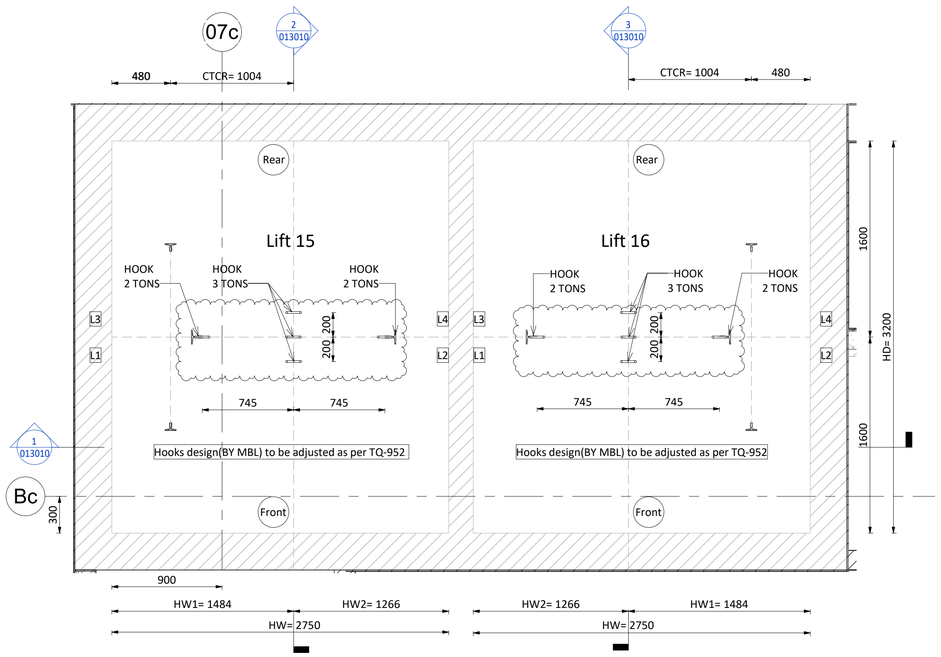


3 Top Hoist Way Hook Plan - ELEV-L15 & L16

1 : 25

SCEC – K&A Reviewed

Civil	Arch.	Elec.	ELV.	Mech.	Acoustic
☒	☒	☒	☐	☒	☒

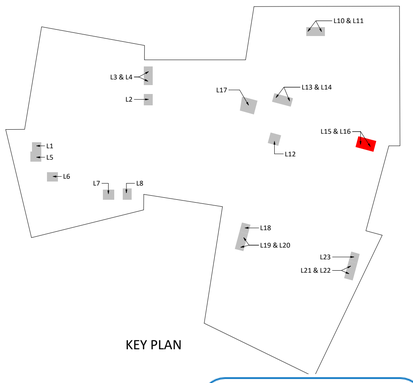


KEY PLAN

SCEC – K&A Reviewed


Code B – Approved with Comments (Do not Resubmit)

CONTROLLED Copy
MBL IFC
JEDDAH OPERA HOUSE PROJECT
QA/QC Department
MBL QAM
Engr. Mudassar Altaf

ELEV-L15 & 16 ELEVATOR GENERAL SPECIFICATIONS	
LIFT NUMBER	ELV.L15 &L16
CABIN INTERNAL SIZE(WXDXH)	1400X2550X2600
CAPACITY	1800Kg
CLEAR ENTRANCE	1300X2400
CONTROL	VVVF
CONTROL SYSTEM	SIMPLEX FULL COLLECTIVE
COUNTERWEIGHT SAFETY	NO
DOOR TYPE	TLD2
EMERGENCY EXITS	-
FRONT OPENING	3
HEAT RELEASE	1774Kcal/h
HOISTWAY SIZE(HWXHD)	2750X3200
LIFT NUMBER	ELV.L15 & 16
LIGHTING SUPPLY	220V 60HZ
MIN.FLOOR HEIGHT	-
NO. OF FLOOR	5
NO. OF OPENINGS	4
NO. OF UNITS	2
NON-STOP FLOORS	1
NON-STOP FLOORS NAMES	B1
NUMBER OF PASSENGERS	24P
OVERHEAD	5300mm
PIT DEPTH	1600mm
PRODUCT NO.	GeN2 MRL
RATED CURRENT(A)	31.4
REAR OPENING	1
ROPING	2:1
SPEED(m/s)	1.00
START CURRENT(A)	34.4
SYSTEM POWER(KW)	16.6
TRAVEL	16625mm
USE	PASSENGER LIFT

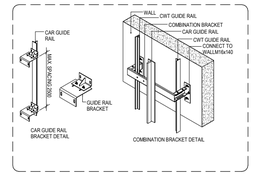


REACTIONS FORCE (KN)			
Car side rail	CWT guide rail	Pit reaction	
R= 86	R= 25	U= 174	
R1= 3.84	R1= 1.65	V= 137	
R2= 2.67	R2= 0.26		



LEGEND	
HW	HOIST WAY WIDTH
HD	HOIST WAY DEPTH
CRH	CAR ROUGH HEIGHT
DOOR OP	DOOR OPENING
ROP	ROUGH OPENING
CW	CAR WIDTH
CD	CAR DEPTH
CH	CAR HEIGHT
DBG	DISTANCE BETWEEN GUARDRAIL
CWT	COUNTERWEIGHT
E&I PANEL	EMERGENCY & INSPECTION PANEL
G.O.V	CAR GOVERNOR
COP	CAR OPERATING PANEL
HBP	HALL POSITION INDICATOR

NOTE No.:
FRONT WALLS,FINISHES & ARCHITRAVES TO BE BUILT (BY CLIENT) AFTER THE INSTALLATION OF THE (LANDING) EXTERNAL DOORS.

IMPORTANT NOTE FOR MAIN CONTRACTOR.
FREEDOM OF ACCESS MUST BE AVAILABLE FOR POINT OF ENTRY INTO THE BUILDING UP TO THE ELEVATOR HOIST WAY AND THE FRONT WALLS OF THE HOIST WAY AT MAIN FLOOR TO BE LEFT OPEN FOR FULL WIDTH AND HEIGHT TO PERMIT ENTRY OF OUR EQUIPMENT.



KEY PLAN

GENERAL NOTES: ALL LEVELS SHOWN ON THE DRAWING ARE CHART DATUM LEVELS PROJECT LEVEL+0.000 = +3.700 CHART DATUM.

DRAWING / DOCUMENT REFERENCE

NO.	NUMBER	TITLE	REV.
01	L-15 & L-16	JOH-HLA-S4-01-056-XXX-02-DR-AR-011120	F00
02		JOH-BHC-S4-01-056-XXX-XX-DR-VT-015001	
03		JOH-BHC-S4-01-056-XXX-XX-DR-VT-010001	
04		JOH-BHC-S4-01-056-005-ZZ-DR-VT-013001	
05		JOH-BHC-S4-01-056-005-ZZ-DR-VT-011001	
06		TQ-OPE-MBL-JCDC-00952	
07		TQ-OPE-MBL-JCDC-00222	
08		TQ-OPE-MBL-JCDC-01052	
09		JCD-OPE-MBL-MR-003-NMR-601-03	
10		JCD-OPE-MBL-MR-003-NMR-602-01	

REVIEWED BY DISCIPLINE	SIGNATURE	DATE
ARCHITECTURAL	[illegible]	[illegible]
STRUCTURAL	[illegible]	[illegible]
MECHANICAL	[illegible]	[illegible]
PLUMBING	[illegible]	[illegible]
ELECTRICAL	[illegible]	[illegible]
ICT	[illegible]	2026-05-1[illegible]
ADDITIONAL DISCIPLINES TO BE ADDED AS REQUIRED		

REV	DATE	BY	DESCRIPTION	CHK	APD
S01	20-APR-2026	AK	Shop Drawing	SS	AB
S00	26-APR-2026	AK	Issued for Approval	SS	AB

DRAWING STATUS: CONSTRUCTION SHOPDRAWING

CLIENT: شركة وسط جدة للتطوير Jeddah Central Development Co.

LEAD DESIGN CONSULTANTS: Henning Larsen

LEAD ENGINEERING CONSULTANT: BURO HAPPOLD

PROJECT SUPERVISION CONSULTANT: K&A

GENERAL CONTRACTOR: MBL

REVIEWER: dar

SUB CONTRACTOR: OTIS ELEVATOR COMPANY SAUDI ARABIA LIMITED

PROJECT: JEDDAH OPERA HOUSE

TITLE: OPERA BUILDING
VERTICAL TRANSPORTATION
PART 004
PLANS - LIFT SHAFT SHEET 02 OF 02 (L15 & L16)


SCALE @ A1:	CHECKED:	APPROVED:
1:25	SS	AB

PROJECT No:	DESIGNED:	DRAWN:	DATE:
440014	AK	PR	20-APR-2026

DRAWING No: JOH-OTS-S5-01-056-004-ZZ-SD-VT-011011 REV: S01


MODEL FILE REF: JOH-OTS-S5-01-056-XXX-ZZ-M3-VT-010001

© JCDC

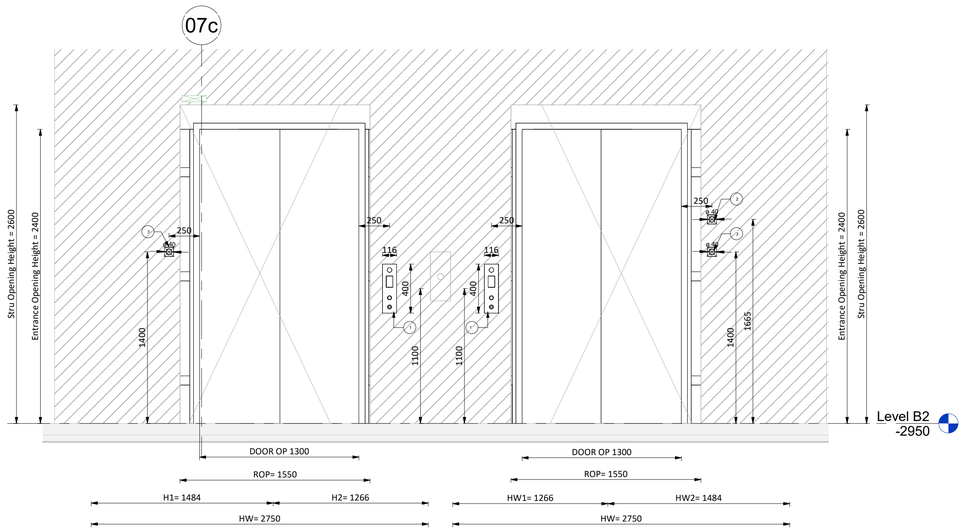


1 Door Elevation At "B2" Floor "REAR" - ELEV-L15 & L16

1 : 25

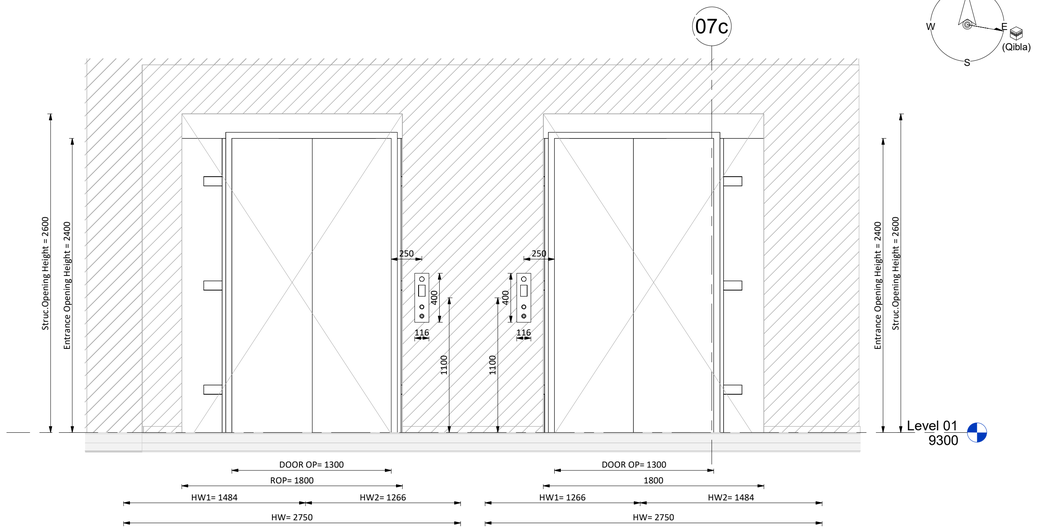


2 Door Elevation AT "G & 1" Floor "FRONT" - ELEV-L15 & L16

1 : 25

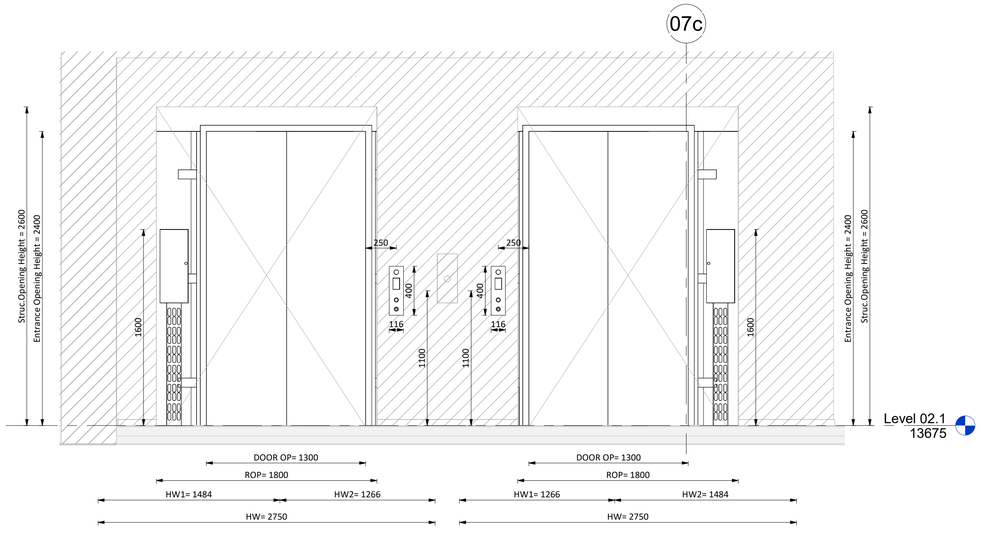


3 Door Elevation AT "Top" Floor "FRONT"- ELEV-L15 & L16

1 : 25

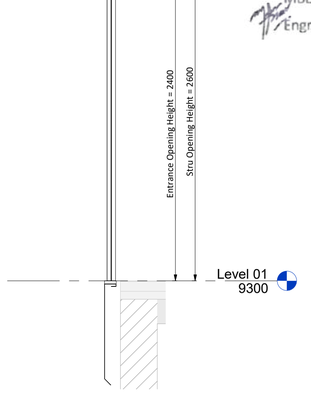


4 Door Cross-Section View A-A - ELEV-L15 & L16

1 : 25

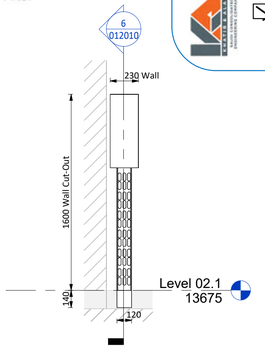


5 E&I SPOT DETAIL - ELEV - L15 & L16


1 : 25

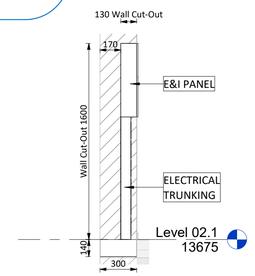

6 Cross-Section View B-B - ELEV - L15 & L16


1 : 25

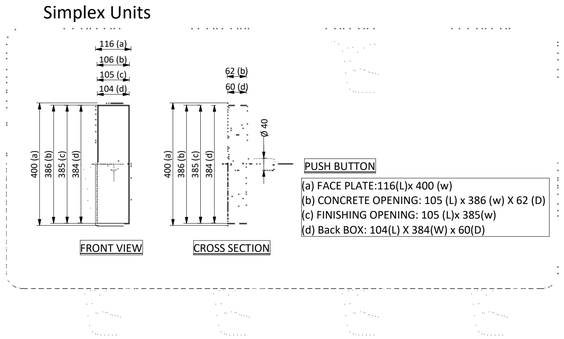

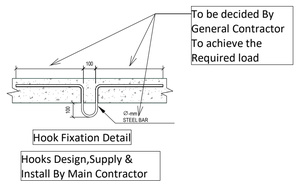

Hook Fixation Detail

Hooks Design,Supply &
Install By Main Contractor

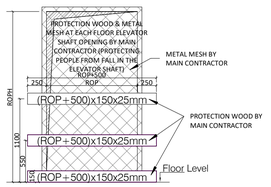

Protection Elevation Detail
At Each Elevator Shaft Opening

LEGEND	
HW	HOIST WAY WIDTH
HD	HOIST WAY DEPTH
CRH	CAR ROUGH HEIGHT
DOOR OP	DOOR OPENING
ROP	ROUGH OPENING
CW	CAR WIDTH
CD	CAR DEPTH
CH	CAR HEIGHT
DBG	DISTANCE BETWEEN GUARDRAIL
CWT	COUNTERWEIGHT
E&I PANEL	EMERGENCY & INSPECTION PANEL
G.O.V	CAR GOVERNOR
COP	CAR OPERATING PANEL
HBP	HALL POSITION INDICATOR


CONTROLLED COPY
MBL IFC
JEDDAH OPERA HOUSE PROJECT
QA/QC Department
MBL QAM
Engr. Mudassar Altaf

SCEC – K&A Reviewed

Civil	Arch.	Elec.	ELV.	Mech.	Acoustic
☒	☒	☒	☐	☒	☒

SCEC – K&A Reviewed
KHATIB & ALAMI
SAUDI CONSOLIDATED ENGINEERING COMPANY

Code B – Approved with Comments (Do not Resubmit)



KEY PLAN

GENERAL NOTES: ALL LEVELS SHOWN ON THE DRAWING ARE CHART DATUM LEVELS PROJECT LEVEL+0.000 = +3.700 CHART DATUM.

DRAWING / DOCUMENT REFERENCE

NO.	NUMBER	TITLE	REV.
01	L-15 & L-16	JOH-HLA-S4-01-056-XXX-02-DR-AR-011120	F00
02		JOH-BHC-S4-01-056-XXX-XX-DR-VT-015001	
03		JOH-BHC-S4-01-056-XXX-XX-DR-VT-010001	
04		JOH-BHC-S4-01-056-005-ZZ-DR-VT-013001	
05		JOH-BHC-S4-01-056-005-ZZ-DR-VT-011001	
06		TQ-OPE-MBL-JCDC-00952	
07		TQ-OPE-MBL-JCDC-00222	
08		TQ-OPE-MBL-JCDC-01052	
09		JCD-OPE-MBL-MR-003-NMR-601-03	
10		JCD-OPE-MBL-MR-003-NMR-602-01	

REVIEWED BY DISCIPLINE	SIGNATURE	DATE
ARCHITECTURAL		
STRUCTURAL		
MECHANICAL		
PLUMBING		
ELECTRICAL		
ICT		
ADDITIONAL DISCIPLINES TO BE ADDED AS REQUIRED		

REV	DATE	BY	DESCRIPTION	CHK	APD
S01	20-APR-2026	AK	Shop Drawing	SS	AB
S00	26-APR-2026	AK	Issued for Approval	SS	AB

DRAWING STATUS: CONSTRUCTION SHOPDRAWING

CLIENT: شركة وسط جدة للتطوير Jeddah Central Development Co.

LEAD DESIGN CONSULTANTS: Henning Larsen

LEAD ENGINEERING CONSULTANT: BURO HAPPOLD

PROJECT SUPERVISION CONSULTANT: KHATIB & ALAMI

GENERAL CONTRACTOR: MBL

REVIEWER: dar

SUB CONTRACTOR: OTIS ELEVATOR COMPANY (SAUDI ARABIA) LIMITED — OTIS

PROJECT: JEDDAH OPERA HOUSE


TITLE: OPERA BUILDING
VERTICAL TRANSPORTATION
PART 004
ELEVATIONS - LIFT SHAFT (L15 & L16)

SCALE @ A1:	CHECKED:		APPROVED:
As Indicated	SS		AB
PROJECT No:	DESIGNED:	DRAWN:	DATE:
440014	AK	PR	20-APR-2026

DRAWING No: JOH-OTS-S5-01-056-004-ZZ-SD-VT-012010 REV: S01

MODEL FILE REF: JOH-OTS-S5-01-056-XXX-ZZ-M3-VT-010001


© JCDC

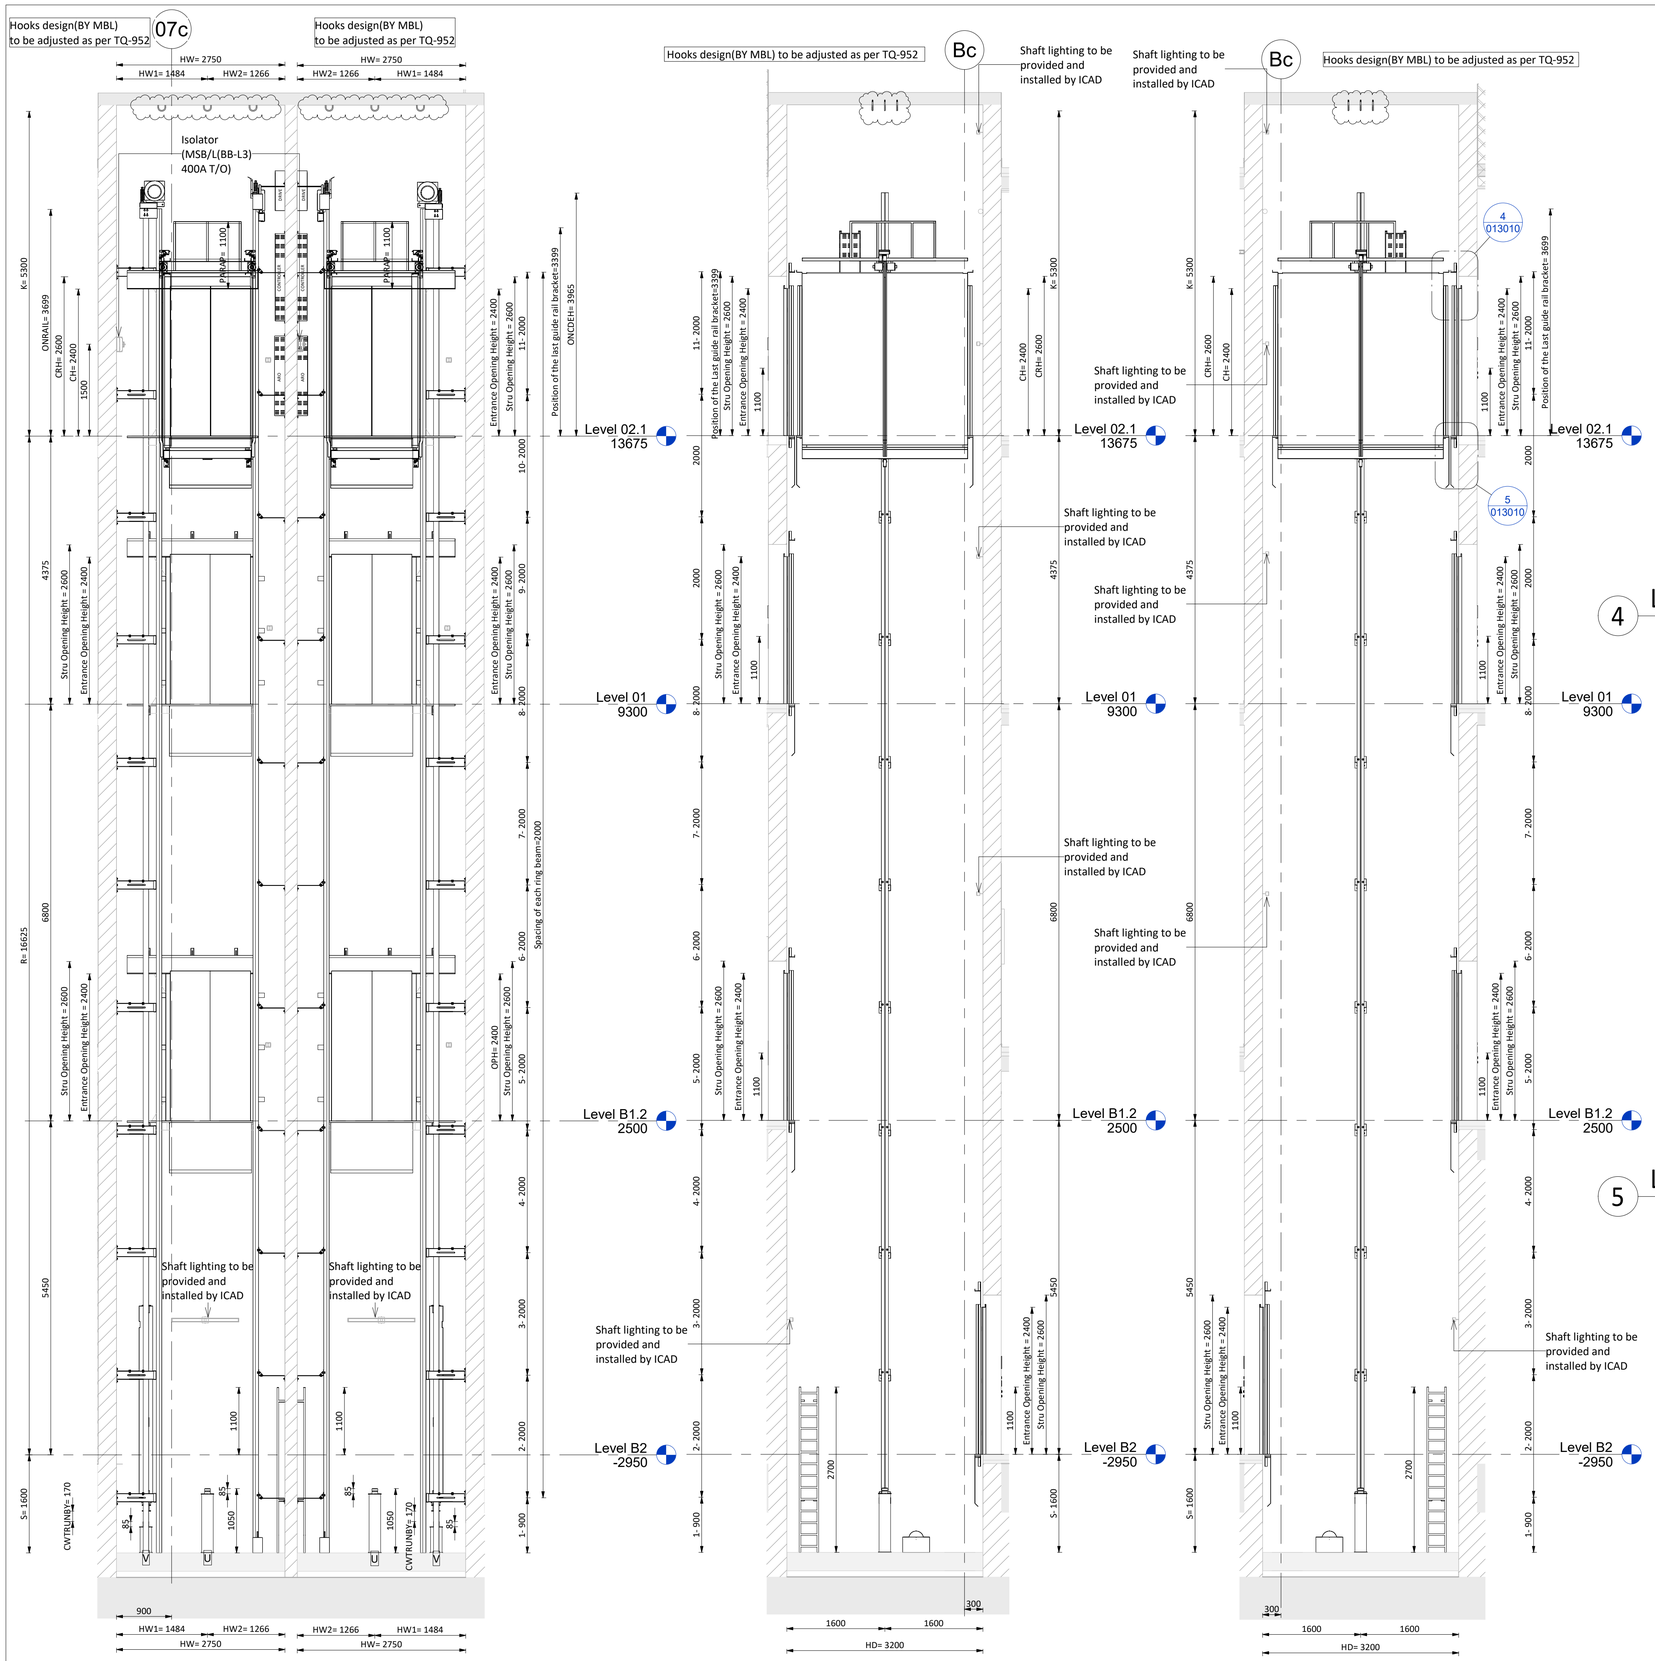


1 Section "A" - ELEV -L15 & L16
1 : 50

2 Section "B" - ELEV-L15
1 : 50


3 Section "C" - ELEV-L16
1 : 50

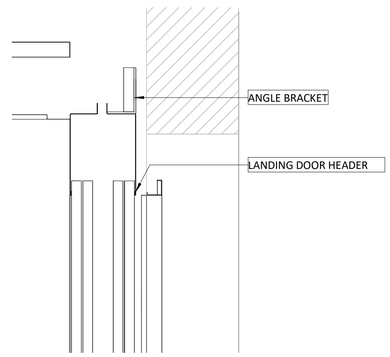

4 Landing Door Header Detail - ELEV-L15 & L16
1 : 10

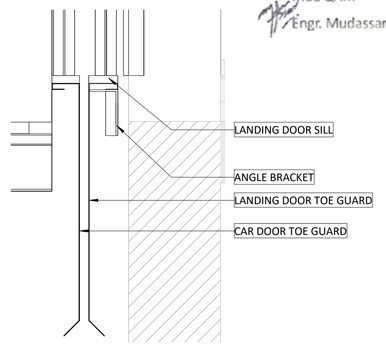

5 Landing Door Bottom Detail - ELEV-L15 & L16
1 : 10

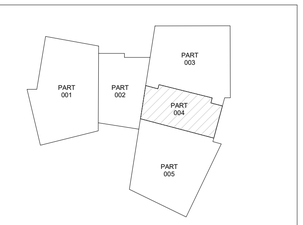

KEY PLAN

GENERAL NOTES: ALL LEVELS SHOWN ON THE DRAWING ARE CHART DATUM LEVELS PROJECT LEVEL+0.000 = +3.700 CHART DATUM.

DRAWING / DOCUMENT REFERENCE

NO.	NUMBER	TITLE	REV.
01	L-15 & L-16	JOH-HLA-S4-01-056-XXX-02-DR-AR-011120	F00
02		JOH-BHC-S4-01-056-XXX-XX-DR-VT-015001	
03		JOH-BHC-S4-01-056-XXX-XX-DR-VT-010001	
04		JOH-BHC-S4-01-056-005-ZZ-DR-VT-013001	
05		JOH-BHC-S4-01-056-005-ZZ-DR-VT-011001	
06		TQ-OPE-MBL-JCDC-00952	
07		TQ-OPE-MBL-JCDC-00222	
08		TQ-OPE-MBL-JCDC-01052	
09		JCD-OPE-MBL-MR-003-NMR-601-03	
10		JCD-OPE-MBL-MR-003-NMR-602-01	

REVIEWED BY DISCIPLINE	SIGNATURE	DATE
ARCHITECTURAL	[illegible]	[illegible]
STRUCTURAL	[illegible]	[illegible]
MECHANICAL	[illegible]	[illegible]
PLUMBING	[illegible]	[illegible]
ELECTRICAL	[illegible]	[illegible]
ICT	[illegible]	[illegible]
ADDITIONAL DISCIPLINES TO BE ADDED AS REQUIRED		

CONTROLLED COPY MBL IFC JEDDAH OPERA HOUSE PROJECT QA/QC Department
MBL QAM
Engr. Mudassar Altaf

SCEC – K&A Reviewed
Civil Arch. Elec. ELV. Mech. Acoustic

SCEC – K&A Reviewed
Code B – Approved with Comments (Do not Resubmit)

REV	DATE	BY	DESCRIPTION	CHK	APD
S01	20-APR-2026	AK	Shop Drawing	SS	AB
S00	26-APR-2026	AK	Issued for Approval	SS	AB

DRAWING STATUS: CONSTRUCTION SHOPDRAWING

CLIENT: Jeddah Central Development Co.

LEAD DESIGN CONSULTANTS: Henning Larsen

LEAD ENGINEERING CONSULTANT: BURO HAPPOLD

PROJECT SUPERVISION CONSULTANT: KHATIB & ALAMI

GENERAL CONTRACTOR: MBL

REVIEWER: dar

SUB CONTRACTOR: OTIS

PROJECT: JEDDAH OPERA HOUSE

TITLE: OPERA BUILDING
VERTICAL TRANSPORTATION
PART 004
SECTIONS - LIFT SHAFT (L15 & L16)

SCALE @ A1:	CHECKED:	APPROVED:
As indicated	SS	AB

PROJECT No:	DESIGNED:	DRAWN:	DATE:
440014	AK	PR	20-APR-2026

DRAWING No: JOH-OTS-S5-01-056-004-ZZ-SD-VT-013010 REV: S01

MODEL FILE REF: JOH-OTS-S5-01-056-XXX-ZZ-M3-VT-010001

© JCDC