

Lift 23

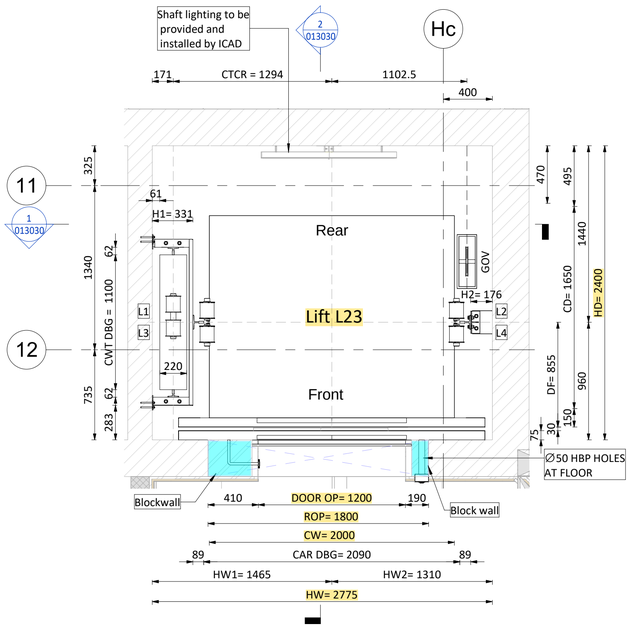


1 Hoist Way Plan At "G" Floor - ELEV-L23

1 : 25

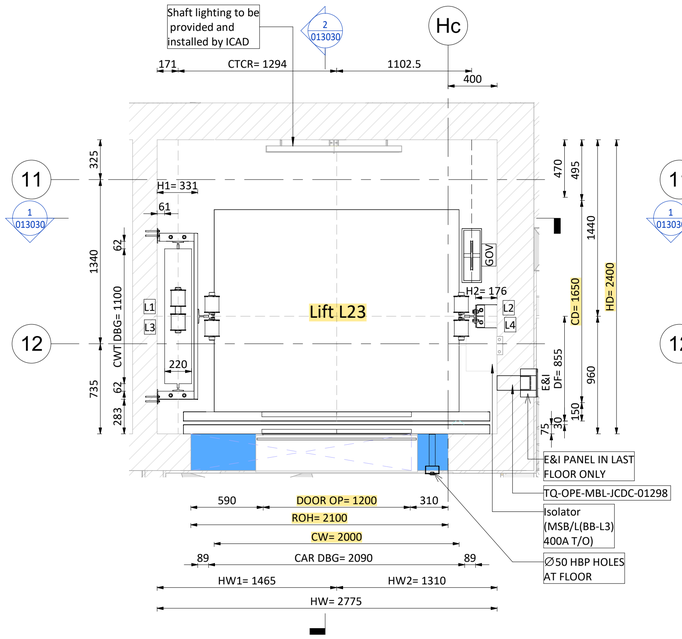

2 Hoist Way Plan At "2" Floor - ELEV-L23

1 : 25

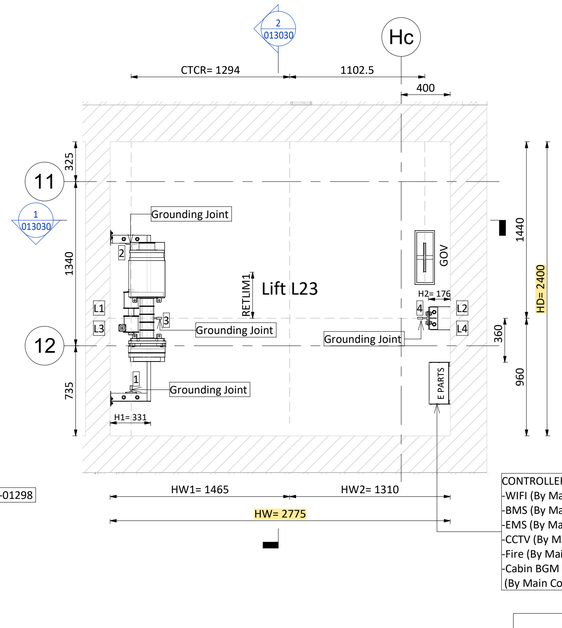

3 Machine Plan Level - ELEV-L23


1 : 25

4 Hoist Way Pit Plan - ELEV-23


1 : 25

5 Top Hoist Way Hook Plan - ELEV-L23

1 : 25

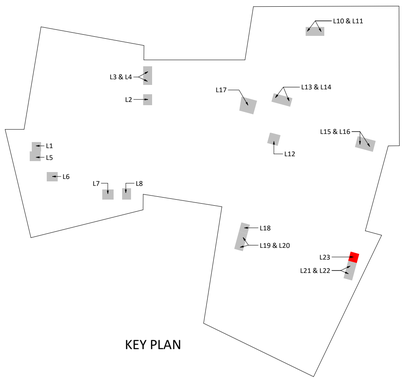

KEY PLAN



SCEC – K&A Reviewed

Code B – Approved with Comments (Do not Resubmit)

SCEC – K&A Reviewed

Civil	Arch.	Elec.	ELV.	Mech.	Acoustic
☒	☒	☒	☐	☒	☒

CONTROLLED COPY MBL IFC JEDDAH OPERA HOUSE PROJECT QM/QC Department

MBL QAM

Engr. Mudassar Altaf


Checked and Reviewed

NOTE No.:
FRONT WALLS,FINISHES & ARCHITRAVES TO BE BUILT (BY MBL/FOH/BOH) AFTER THE INSTALLATION OF THE (LANDING) EXTERNAL DOORS.


IMPORTANT NOTE FOR MAIN CONTRACTOR.
FREEDOM OF ACCESS MUST BE AVAILABLE FOR POINT OF ENTRY INTO THE BUILDING UP TO THE ELEVATOR HOIST WAY AND THE FRONT WALLS OF THE HOIST WAY AT MAIN FLOOR TO BE LEFT OPEN FOR FULL WIDTH AND HEIGHT TO PERMIT ENTRY OF OUR EQUIPMENT.

ELEV-L23 ELEVATOR GENERAL SPECIFICATIONS	
LIFT NUMBER	ELV.L23
CABIN INTERNAL SIZE(WXDXH)	2000X1650X2600
CAPACITY	1600 Kg
CLEAR ENTRANCE	1200X2400
CONTROL	VVVF
CONTROL SYSTEM	DUPLEX DOWN COLLECTIVE
COUNTERWEIGHT SAFETY	NO
DOOR TYPE	CLD1
EMERGENCY EXITS	-
FRONT OPENING	2
HEAT RELEASE	1616Kcal/h
HOISTWAY SIZE(HWXHD)	2775X2400
LIFT NUMBER	ELV.L23
LIGHTING SUPPLY	220V 60HZ
MIN.FLOOR HEIGHT	3000
NO. OF FLOOR	3
NO. OF OPENINGS	2
NO. OF UNITS	1
NON-STOP FLOORS	L01
NON-STOP FLOORS NAMES	LEVEL 00.1
NUMBER OF PASSENGERS	21P
OVERHEAD	5400mm
PIT DEPTH	1600mm
POWER SUPPLY	380V 3P 60HZ
PRODUCT NO.	GeN2 MRL
RATED CURRENT(A)	25.6
REAR OPENING	-
ROPING	2:1
SPEED(m/s)	1.00
START CURRENT(A)	28.4
SYSTEM POWER(KW)	13.5
TRAVEL	8925 mm
USE	VIP PASSENGER LIFT

REACTIONS FORCE (KN)			
Car side rail	CWT guide rail	Pit reaction	
R= 41	R= 15	U= 165	
R1= 2.47	R1= 1.13	V= 132	
R2= 3.14	R2= 0.3		



LEGEND	
HW	HOIST WAY WIDTH
HD	HOIST WAY DEPTH
CRH	CAR ROUGH HEIGHT
DOOR OP	DOOR OPENING
ROP	ROUGH OPENING
CW	CAR WIDTH
CD	CAR DEPTH
CH	CAR HEIGHT
DBG	DISTANCE BETWEEN GUARDRAIL
CWT	COUNTERWEIGHT
E&I PANEL	EMERGENCY & INSPECTION PANEL
G.O.V	CAR GOVERNOR
COP	CAR OPERATING PANEL
HBP	HALL POSITION INDICATOR



KEY PLAN

GENERAL NOTES: ALL LEVELS SHOWN ON THE DRAWING ARE CHART DATUM LEVELS PROJECT LEVEL+0.000 = +3.700 CHART DATUM.

Notes:

- All shop drawings have been extracted from the BIM federated model.
- The Contractor will carry out a site survey prior to execution.
- All levels indicated have been taken from the federated model.
- All car dimensions are in accordance with the approved TBE.
- Car interior finishes will be submitted under a separate submittal.
- No hoist-way pressurization is required for the Opera Building.
- Ladder specification:
  - * Type: Folding ladder (with a switch to protect the maintenance in the pit)
  - * Material: Q235 tube (welding and painted yellow)
  - * Length: About 1100mm above bottom landing
  - * Note: the ladder will be divided into two parts to deliver.

DRAWING / DOCUMENT REFERENCE

NO.	NUMBER	TITLE	REV.
01	L-23	JOH-HLA-S4-01-056-005-00-DR-AR-011105	S00
02		JOH-BHC-S4-01-056-XXX-XX-DR-VT-015001	
03		JOH-BHC-S4-01-056-XXX-XX-DR-VT-010001	
04		JOH-BHC-S4-01-056-005-ZZ-DR-VT-013001	
05		JOH-BHC-S4-01-056-005-ZZ-DR-VT-011001	
06		TQ-OPE-MBL-JCDC-00222	
07		JCD-OPE-MBL-MR-003-NMR-601-03	
08		JCD-OPE-MBL-MR-003-NMR-602-01	
09		TQ-OPE-MBL-JCDC-01298	
10		TR-OPE-MBL-JCDC-05193-01	
11		TQ-OPE-MBL-JCDC-00974	

REVIEWED BY DISCIPLINE	SIGNATURE	DATE
ARCHITECTURAL	MT	2026-06-30
STRUCTURAL	PC	2026-06-30
MECHANICAL	SI.A	2026-06-30
PLUMBING	SI.A	2026-06-30
ELECTRICAL	SI.A	2026-06-30
ICT	SI.A	2026-06-30
ADDITIONAL DISCIPLINES TO BE ADDED AS REQUIRED		

REV	DATE	BY	DESCRIPTION	CHK	APD
S00	09-JUNE-2026	AK	Issued for Approval	SS	AB

DRAWING STATUS: CONSTRUCTION SHOPDRAWING

CLIENT: شركة وسط جدة للتطوير Jeddah Central Development Co.

LEAD DESIGN CONSULTANTS: Henning Larsen

LEAD ENGINEERING CONSULTANT: BURO HAPPOLD

PROJECT SUPERVISION CONSULTANT: K&A

GENERAL CONTRACTOR: MBL

REVIEWER: dar

SUB CONTRACTOR: OTIS ELEVATOR COMPANY (SAUDI ARABIA) LIMITED — OTIS

PROJECT: JEDDAH OPERA HOUSE

TITLE: OPERA BUILDING
VERTICAL TRANSPORTATION
PART 005
PLANS - LIFT SHAFT (L23)


SCALE @ A1:	CHECKED:	APPROVED:
As indicated	SS	AB

PROJECT No:	DESIGNED:	DRAWN:	DATE:
440014	AK	PR	09-JUNE-2026

DRAWING No: JOH-OTS-S5-01-056-005-ZZ-SD-VT-011030 REV: S00

MODEL FILE REF: JOH-OTS-S5-01-056-XXX-ZZ-M3-VT-010001


© JCDC

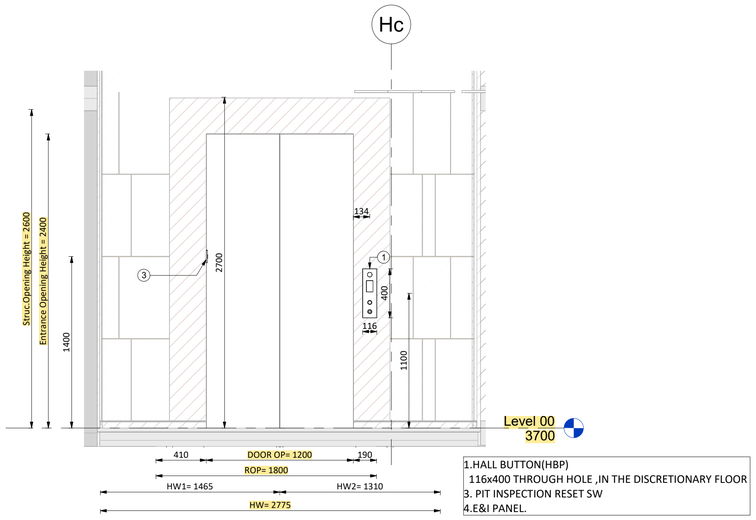

1.HALL BUTTON(HBP)
116x400 THROUGH HOLE ,IN THE DISCRETIONARY FLOOR
3. PIT INSPECTION RESET SW
4.E&I PANEL.


1 Door Elevation At "G" Floor - ELEV-L23


1 : 25

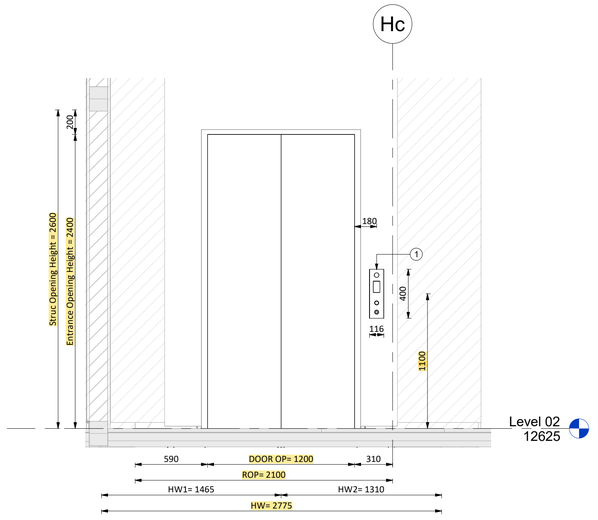

2 Door Elevation At "2" Floor - ELEV-L23


1 : 25



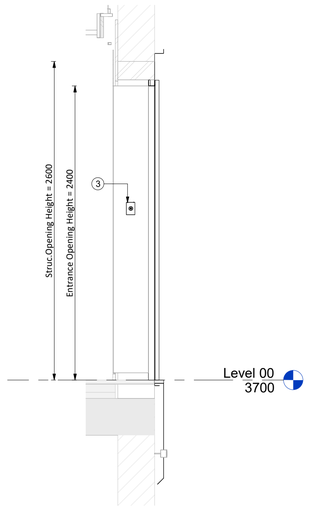

6 Cross-Section View A-A - ELEV-L23

1 : 25



KEY PLAN

GENERAL NOTES: ALL LEVELS SHOWN ON THE DRAWING ARE CHART DATUM LEVELS PROJECT LEVEL+0.000 = +3.700 CHART DATUM.

Notes:

- All shop drawings have been extracted from the BIM federated model.
- The Contractor will carry out a site survey prior to execution.
- All levels indicated have been taken from the federated model.
- All car dimensions are in accordance with the approved TBE.
- Car interior finishes will be submitted under a separate submittal.
- No hoist-way pressurization is required for the Opera Building.
- Ladder specification:
  - * Type: Folding ladder (with a switch to protect the maintenance in the pit)
  - * Material: Q235 tube (welding and painted yellow)
  - * Length: About 1100mm above bottom landing
  - * Note: the ladder will be divided into two parts to deliver.

DRAWING / DOCUMENT REFERENCE

NO.	NUMBER	TITLE	REV.
01	L-23	JOH-HLA-S4-01-056-005-00-DR-AR-011105	S00
02		JOH-BHC-S4-01-056-XXX-XX-DR-VT-015001	
03		JOH-BHC-S4-01-056-XXX-XX-DR-VT-010001	
04		JOH-BHC-S4-01-056-005-ZZ-DR-VT-013001	
05		JOH-BHC-S4-01-056-005-ZZ-DR-VT-011001	
06		TQ-OPE-MBL-JCDC-00222	
07		JCD-OPE-MBL-MR-003-NMR-601-03	
08		JCD-OPE-MBL-MR-003-NMR-602-01	
09		TQ-OPE-MBL-JCDC-01298	
10		TR-OPE-MBL-JCDC-05193-01	
11		TQ-OPE-MBL-JCDC-00974	

REVIEWED BY DISCIPLINE	SIGNATURE	DATE
ARCHITECTURAL	MT	2026-06-30
STRUCTURAL	PC	2026-06-30
MECHANICAL	Sh.A	2026-06-30
PLUMBING	Sh.A	2026-06-30
ELECTRICAL	Sh.A	2026-06-30
ICT	Sh.A	2026-06-30
ADDITIONAL DISCIPLINES TO BE ADDED AS REQUIRED		

REV	DATE	BY	DESCRIPTION	CHK	APD
S00	09-JUNE-2026	AK	Issued for Approval	SS	AB

DRAWING STATUS: CONSTRUCTION SHOPDRAWING

CLIENT: شركة وسط جدة للتطوير Jeddah Central Development Co.

LEAD DESIGN CONSULTANTS: Henning Larsen

LEAD ENGINEERING CONSULTANT: BURO HAPPOLD

PROJECT SUPERVISION CONSULTANT: KHATIB & ALAMI

GENERAL CONTRACTOR: MBL

REVIEWER: dar

SUB CONTRACTOR: OTIS ELEVATOR COMPANY SAUDI ARABIA LIMITED — OTIS

PROJECT: JEDDAH OPERA HOUSE

TITLE: OPERA BUILDING
VERTICAL TRANSPORTATION
PART 005
ELEVATIONS - LIFT SHAFT (L23)

SCALE @ A1:	CHECKED:	APPROVED:
As indicated	SS	AB
PROJECT No:	DESIGNED: AK	DRAWN: PR	DATE: 09-JUNE-2026
440014			

DRAWING No: JOH-OTS-S5-01-056-005-ZZ-SD-VT-012030 — REV: S00

MODEL FILE REF: JOH-OTS-S5-01-056-XXX-ZZ-M3-VT-010001

© JCDC


4 E&I SPOT DETAIL - ELEV-L23

1 : 25

5 Cross-Section View B-B - ELEV-L23


1 : 25

Simplex Units



PUSH BUTTON

(a) FACE PLATE:116(L)x 400 (w)
(b) CONCRETE OPENING: 105 (L) x 386 (w) X 62 (D)
(c) FINISHING OPENING: 105 (L)x 385(w)
(d) Back BOX: 104(L) X 384(W) x 60(D)



Protection Elevation Detail
At Each Elevator Shaft Opening


CONTROLLED COPY
MBL IFC
JEDDAH OPERA HOUSES PROJECT
QA/QC Department
MBL QAM
Engr. Mudassar Altaf

LEGEND	
HW	HOIST WAY WIDTH
HD	HOIST WAY DEPTH
CRH	CAR ROUGH HEIGHT
DOOR OP	DOOR OPENING
ROP	ROUGH OPENING
CW	CAR WIDTH
CD	CAR DEPTH
CH	CAR HEIGHT
DBG	DISTANCE BETWEEN GUARDRAIL
CWT	COUNTERWEIGHT
E&I PANEL	EMERGENCY & INSPECTION PANEL
G.O.V	CAR GOVERNOR
COP	CAR OPERATING PANEL
HBP	HALL BUTTON POSITION INDICATOR

SCEC – K&A Reviewed
Civil Arch. Elec. ELV. Mech. Acoustic


SCEC – K&A Reviewed
Code B – Approved with Comments
(Do not Resubmit)

dar Checked and Reviewed

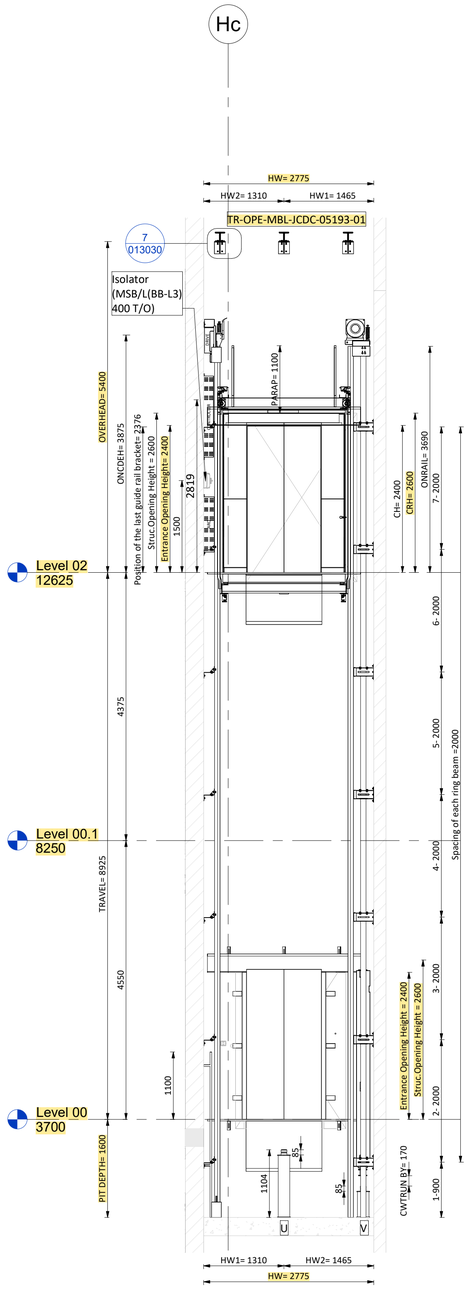


1 SECTION "A" - ELEV-L23

1 : 50

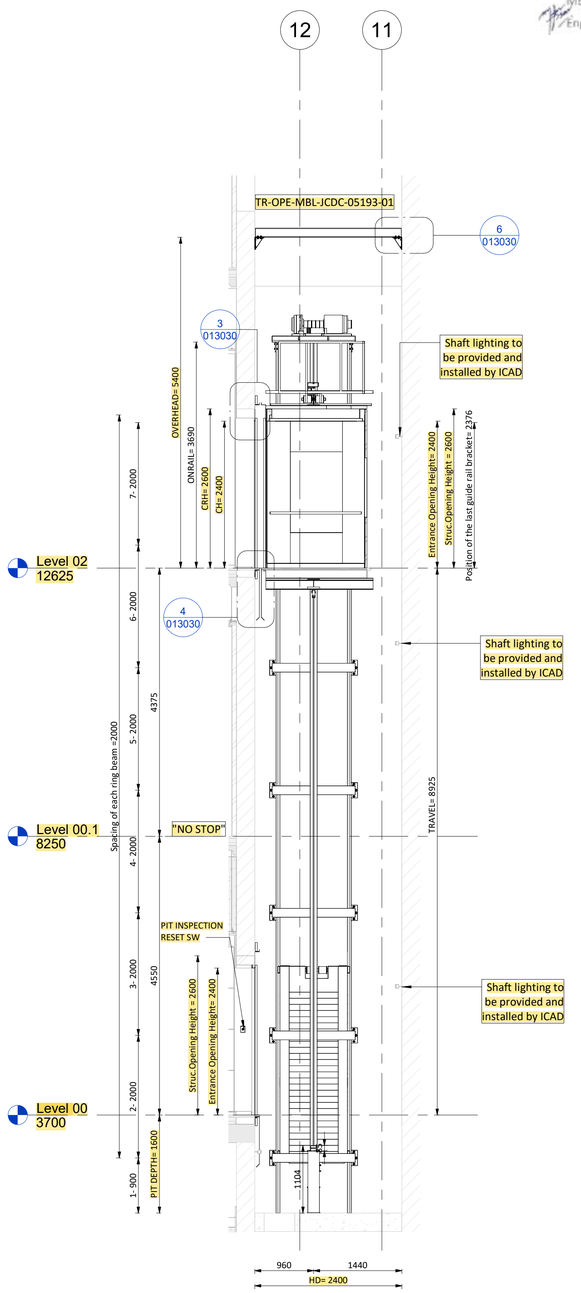


2 SECTION "B" - ELEV-L23

1 : 50




3 Landing Door Header Detail - ELEV-23

1 : 10

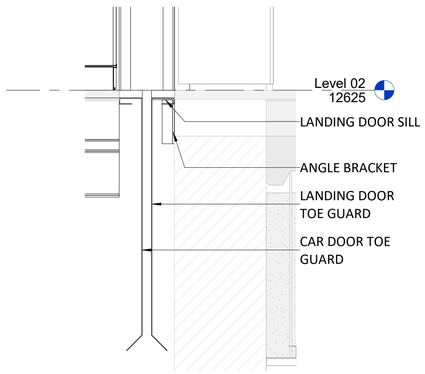


4 Landing Door Bottom Detail - ELEV-L23

1 : 10




5 DETAIL (A)

1 : 12



6 DETAIL (A1-A1)

1 : 25



7 DETAIL (B1-B1)

1 : 12


CONTROLLED COPY
MBL IFC
JED040 OPERA HOUSE PROJECT
QA/QC Department
MBL QAM
Engr. Mudassar Altaf

SCEC – K&A Reviewed

Civil	Arch.	Elec.	ELV.	Mech.	Acoustic
☒	☒	☒	☐	☒	☒

SCEC – K&A Reviewed
Code B – Approved with Comments
(Do not Resubmit)

N W E S (Qibla)



KEY PLAN

GENERAL NOTES: ALL LEVELS SHOWN ON THE DRAWING ARE CHART DATUM LEVELS PROJECT LEVEL+0.000 = +3.700 CHART DATUM.

Notes:

- All shop drawings have been extracted from the BIM federated model.
- The Contractor will carry out a site survey prior to execution.
- All levels indicated have been taken from the federated model.
- All car dimensions are in accordance with the approved TBE.
- Car interior finishes will be submitted under a separate submittal.
- No hoist-way pressurization is required for the Opera Building.
- Ladder specification:
  - * Type: Folding ladder (with a switch to protect the maintenance in the pit)
  - * Material: Q235 tube (welding and painted yellow)
  - * Length: About 1100mm above bottom landing
  - * Note: the ladder will be divided into two parts to deliver.

DRAWING / DOCUMENT REFERENCE

NO.	NUMBER	TITLE	REV.
01	L-23	JOH-HLA-S4-01-056-005-00-DR-AR-011105	F00
02		JOH-BHC-S4-01-056-XXX-XX-DR-VT-015001	
03		JOH-BHC-S4-01-056-XXX-XX-DR-VT-010001	
04		JOH-BHC-S4-01-056-005-ZZ-DR-VT-013001	
05		JOH-BHC-S4-01-056-005-ZZ-DR-VT-011001	
06		TQ-OPE-MBL-JCDC-00222	
07		JCD-OPE-MBL-MR-003-NMR-601-03	
08		JCD-OPE-MBL-MR-003-NMR-602-01	
09		TQ-OPE-MBL-JCDC-01298	
10		TR-OPE-MBL-JCDC-05193-01	
11		TQ-OPE-MBL-JCDC-00974	

REVIEWED BY DISCIPLINE	SIGNATURE	DATE
ARCHITECTURAL	MT	2026-06-30
STRUCTURAL	PC	2026-06-30
MECHANICAL	SS.A	2026-06-30
PLUMBING	SS.A	2026-06-30
ELECTRICAL	SS.A	2026-06-30
ICT	SS.A	2026-06-30
ADDITIONAL DISCIPLINES TO BE ADDED AS REQUIRED		

REV	DATE	BY	DESCRIPTION	CHK	APD
S00	09-JUNE-2026	AK	Issued for Approval	SS	AB

DRAWING STATUS: CONSTRUCTION SHOPDRAWING

CLIENT: شركة وسط جدة للتطوير Jeddah Central Development Co.

LEAD DESIGN CONSULTANTS: Henning Larsen

LEAD ENGINEERING CONSULTANT: BURO HAPPOLD

PROJECT SUPERVISION CONSULTANT: KHATIB & ALAMI

GENERAL CONTRACTOR: MBL

REVIEWER: dar

SUB CONTRACTOR: OTIS ELEVATOR COMPANY SAUDI ARABIA LIMITED

PROJECT: JEDDAH OPERA HOUSE

TITLE: OPERA BUILDING
VERTICAL TRANSPORTATION
PART 005
SECTIONS - LIFT SHAFT (L23)

SCALE @ A1:	CHECKED:	APPROVED:
As indicated	SS	AB

PROJECT No:	DESIGNED:	DRAWN:	DATE:
440014	AK	PR	09-JUNE-2026

DRAWING No: JOH-OTS-S5-01-056-005-ZZ-SD-VT-013030 REV: S00

MODEL FILE REF: JOH-OTS-S5-01-056-XXX-ZZ-M3-VT-010001

dar Checked and Reviewed

© JCDC