

Lift 24,25

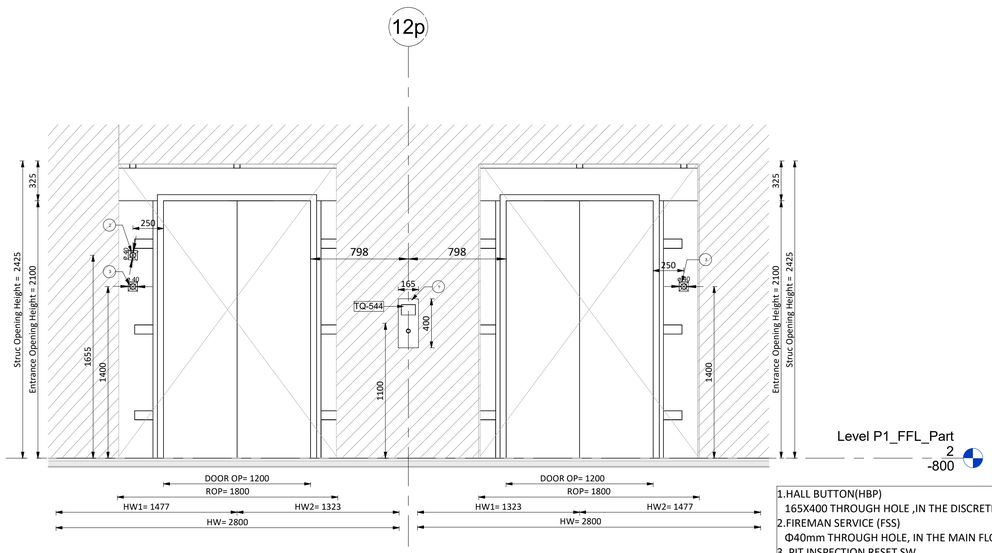

1.HALL BUTTON(HBP)
165X400 THROUGH HOLE ,IN THE DISCRETIONARY FLOOR
2.FIREMAN SERVICE (FSS)
Φ40mm THROUGH HOLE, IN THE MAIN FLOOR
3. PIT INSPECTION RESET SW
Φ40mm ONLY FOR PIT LANDING
4.E&I PANEL.


1 Door Elevation At "B2" Floor - ELEV-L24 & L25

1 : 25

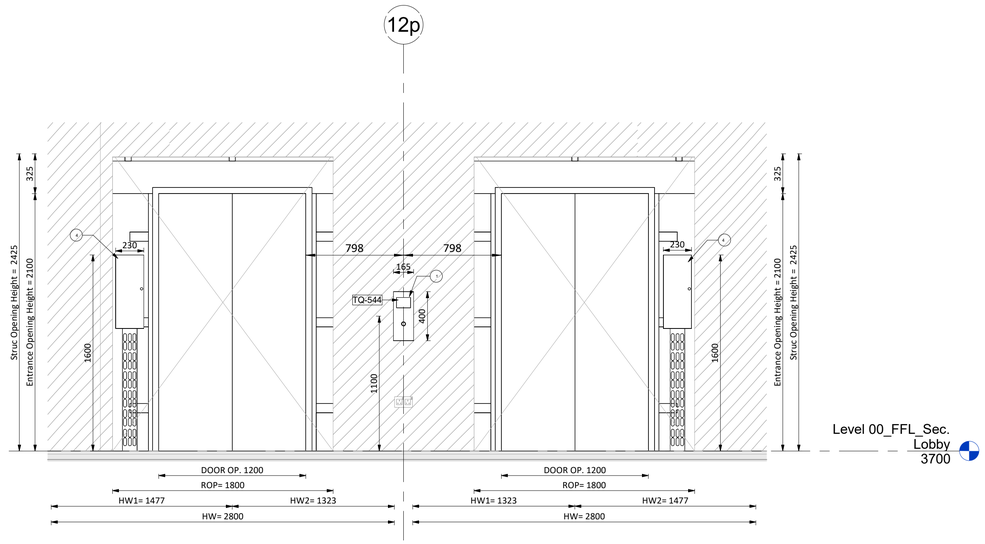

2 Door Elevation At "B1" Floor - ELEV-L24 & L25

1 : 25



KEY PLAN

GENERAL NOTES: ALL LEVELS SHOWN ON THE DRAWING ARE CHART DATUM LEVELS PROJECT LEVEL+0.000 = +2.000 CHART DATUM.

For Panels distribution layout and Connection details Please Refer to drawing No. (JOH-ICD-S5-01-015-XXX-P1-SD-EL-011600)

DRAWING / DOCUMENT REFERENCE

NO.	NUMBER	TITLE	REV.
01	L24 & L25	JOH-HLA-S4-01-015-XXX-P1-DR-AR-011100	F00
02		JOH-BHC-S4-01-056-XXX-XX-DR-VT-015001	
03		JOH-BHC-S4-01-056-XXX-XX-DR-VT-010001	
04		JOH-BHC-S4-01-056-005-ZZ-DR-VT-013001	
05		JOH-BHC-S4-01-056-005-ZZ-DR-VT-011001	
06		TQ-OPE-MBL- JCDC-00952	
07		TQ-OPE-MBL-JCDC-00544	
08		TQ-OPE-MBL-JCDC-00222	
09		TQ-OPE-OTIS-MBL-0008	
10		TQ-OPE-OTIS-MBL-0010	

REVIEWED BY DISCIPLINE	SIGNATURE	DATE
ARCHITECTURAL	AR	[illegible]
STRUCTURAL	PC	26-04-22
MECHANICAL	SHA	2026-04-22
PLUMBING	SHA	26-04-22
ELECTRICAL	[illegible]	[illegible]
ICT	[illegible]	[illegible]
ADDITIONAL DISCIPLINES TO BE ADDED AS REQUIRED		

REV	DATE	BY	DESCRIPTION	CHK	APD
SO1	16-APR-2026	AK	Shop drawing	DK	SS
S00	06-NOV-2025	AK	Issued for Approval	NA	SS

DRAWING STATUS: CONSTRUCTION SHOPDRAWING

CLIENT: شركة وسط جدة للتطوير Jeddah Central Development Co.

LEAD DESIGN CONSULTANTS: Henning Larsen

LEAD ENGINEERING CONSULTANT: BURO HAPPOLD

PROJECT SUPERVISION CONSULTANT: KHATIB & ALAMI

GENERAL CONTRACTOR: MBL

REVIEWER: dar

SUB CONTRACTOR: OTIS ELEVATOR COMPANY (SAUDI ARABIA) LIMITED

PROJECT: JEDDAH OPERA HOUSE

TITLE: CARPARK BUILDING
VERTICAL TRASNPORTATION
PART 002
ELEVATIONS - MAIN LOBBY LIFT SHAFT (L24 & L25)


SCALE @ A1:	CHECKED:	APPROVED:
As indicated	Salma Sakr	Ali Basit

PROJECT No:	DESIGNED:	DRAWN:	DATE:
440014	Abdul Kafoor	Pranoti	06-NOV-2025

DRAWING No: JOH-OTS-S5-01-015-002-ZZ-SD-VT-012010 REV: SO1


MODEL FILE REF: JOH-OTS-S5-01-015-XXX-ZZ-M3-VT-010001

© JCDC

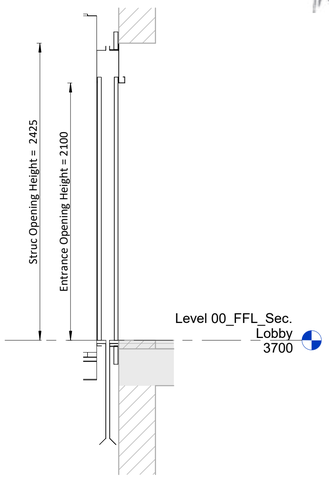


3 Cross-Section View A-A - ELEV-L24 & L25

1 : 25

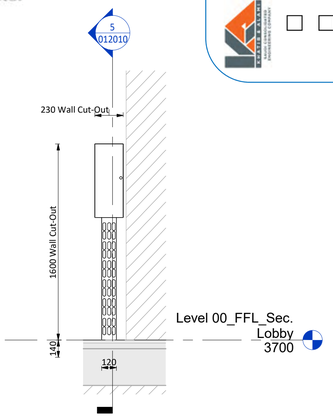

4 E&I SPOT DETAIL - ELEV-L24 & L25


1 : 25

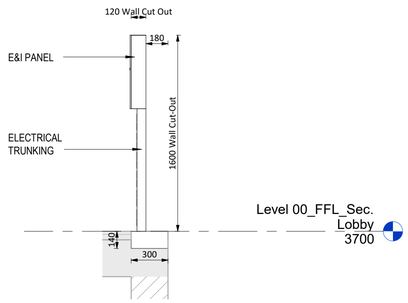


5 Cross-Section View B-B - ELEV-L24 & L25

1 : 25


Duplex Units

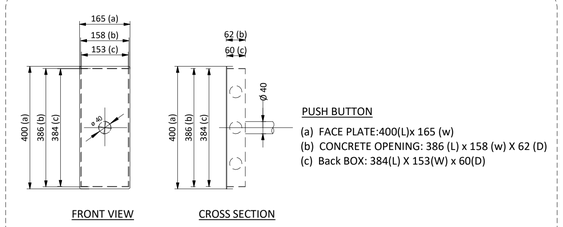

PUSH BUTTON
(a) FACE PLATE:400(L)x 165 (w)
(b) CONCRETE OPENING: 386 (L) x 158 (w) X 62 (D)
(c) Back BOX: 384(L) X 153(W) x 60(D)



Protection Elevation Detail
At Each Elevator Shaft Opening



To be decided By General Contractor To achieve the Required load

Hook Fixation Detail

Hooks Design,Supply & Install By Main Contractor

LEGEND	
HW	HOIST WAY WIDTH
HD	HOIST WAY DEPTH
CRH	CAR ROUGH HEIGHT
DOOR OP	DOOR OPENING
ROP	ROUGH OPENING
CW	CAR WIDTH
CD	CAR DEPTH
CH	CAR HEIGHT
DBG	DISTANCE BETWEEN GUARDRAIL
CWT	COUNTERWEIGHT
E&I PANEL	EMERGENCY & INSPECTION PANEL
G.O.V	CAR GOVERNOR
COP	CAR OPERATING PANEL
HBP	HALL POSITION INDICATOR


SCEC – K&A Reviewed

Civil	Arch.	Elec.	ELV.	Mech.	Acoustic
☐	☐	☒	☐	☒	☒

SCEC – K&A Reviewed
Code B – Approved with Comments
(Do not Resubmit)


CONTROLLED COPY
MBL IFC
JEDDAH OPERA HOUSE PROJECT
QA/QC Department
MBL QAM
Engr. Mudassar Altaf

dar Al-Handasah consultants (Shair and Partners)
Checked and Reviewed
Refer to CRS - SD-OPE-MBL-JCDC-01481

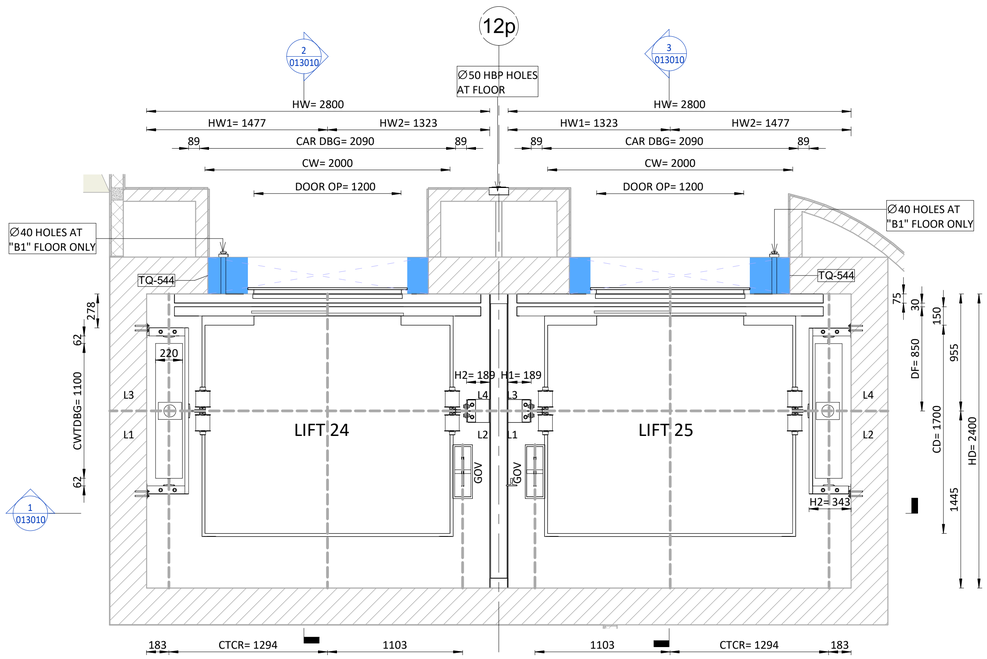


1 Hoist Way Plan At "B2" Floor - ELEV-L24 & L25

1 : 25

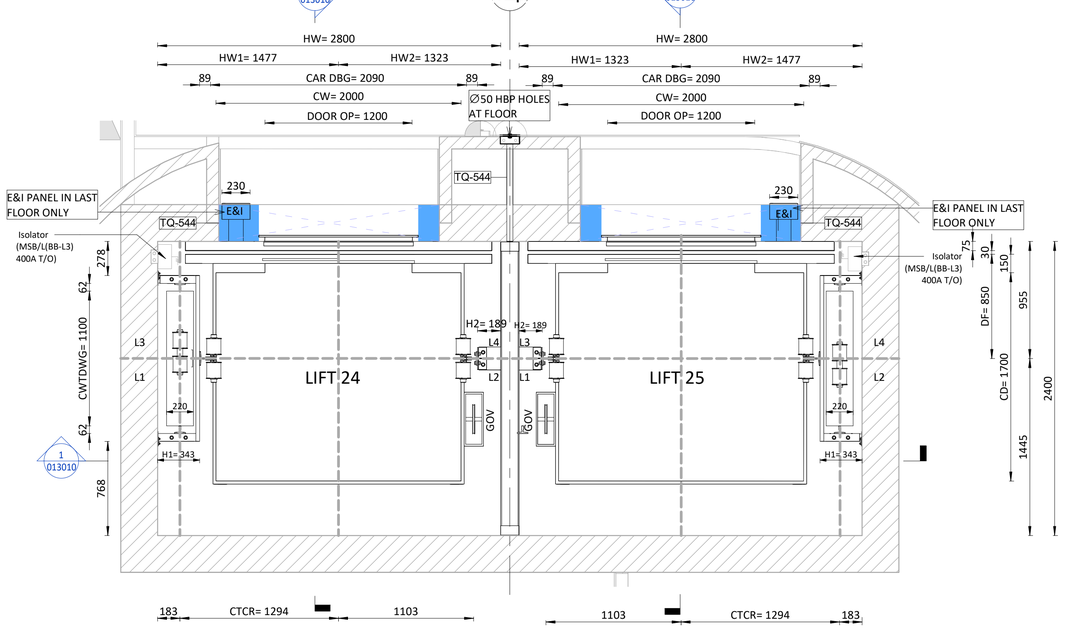

2 Hoist Way Plan At "B1" Floor - ELEV-L24 & L25

1 : 25

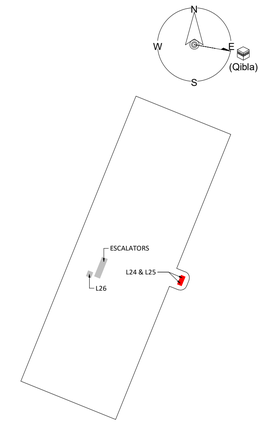

KEY PLAN

ELEV-L24 & L25 ELEVATOR GENERAL SPECIFICATIONS	
LIFT NUMBER	ELEV.L24 & L25
CABIN INTERNAL SIZE(WXDXH)	2000X1700X2600
CAPACITY	1600 Kg
CLEAR ENTRACE	1200X2100
CONTROL	VVVF
CONTROL SYSTEM	DUPLEX DOWN COLLECTIVE
COUNTERWEIGHT SAFETY	NO
DOOR TYPE	CLD1
EMERGENCY EXITS	-
FRONT OPENING	2
HEAT RELEASE	1616Kcal/h
HOISTWAY SIZE(HWXHD)	2800X2400
LIFT NUMBER	ELV.L24 & 25
LIGHTING SUPPLY	220V 60HZ
MIN.FLOOR HEIGHT	3000
NO. OF FLOOR	2
NO. OF OPENINGS	2
NO. OF UNITS	2
NON-STOP FLOORS	-
NON-STOP FLOORS NAMES	-
NUMBER OF PASSENGERS	21P
OVERHEAD	4050mm
PIT DEPTH	1600mm
POWER SUPPLY	380V 3P 60HZ
PRODUCT NO.	GeN2 MRL
RATED CURRENT(A)	25.6
REAR OPENING	-
ROPING	2:1
SPEED(m/s)	1.00
START CURRENT(A)	28.4
SYSTEM POWER(KW)	13.5
TRAVEL	4500mm
USE	PASSENGER LIFT

REACTIONS FORCE (KN)			
Car side rail	CWT guide rail	Pit reaction	
R= 41	R= 15	U= 165	R, R2, R2, R1
R1= 2.47	R1= 1.13	V= 132	
R2= 3.14	R2= 0.3		

LEGEND	
HW	HOIST WAY WIDTH
HD	HOIST WAY DEPTH
CRH	CAR ROUGH HEIGHT
DOOR OP	DOOR OPENING
ROP	ROUGH OPENING
CW	CAR WIDTH
CD	CAR DEPTH
CH	CAR HEIGHT
DBG	DISTANCE BETWEEN GUARDRAIL
CWT	COUNTERWEIGHT
E&I PANEL	EMERGENCY & INSPECTION PANEL
G.O.V	CAR GOVERNOR
COP	CAR OPERATING PANEL
HBP	HALL POSITION INDICATOR


NOTE No.:
FRONT WALLS,FINISHES & ARCHITRAVES TO BE BUILT (BY CLIENT) AFTER THE INSTALLATION OF THE (LANDING) EXTERNAL DOORS.

IMPORTANT NOTE FOR MAIN CONTRACTOR.
FREEDOM OF ACCESS MUST BE AVAILABLE FOR POINT OF ENTRY INTO THE BUILDING UP TO THE ELEVATOR HOIST WAY AND THE FRONT WALLS OF THE HOIST WAY AT MAIN FLOOR TO BE LEFT OPEN FOR FULL WIDTH AND HEIGHT TO PERMIT ENTRY OF OUR EQUIPMENT.


CONTROLLED COPY
MBL IFC
JEDDAH OPERA HOUSE PROJECT
QA/QC Department
MBL QAM
Engr. Mudassar Altaf

SCEC – K&A Reviewed
Civil ☐ Arch. ☐ Elec. ☒ ELV. ☐ Mech. ☒ Acoustic ☒

SCEC – K&A Reviewed
Code B – Approved with Comments
(Do not Resubmit)



dar
Checked and Reviewed
Refer to CRS - SD-OPE-MBL-JCDC-01481



KEY PLAN

GENERAL NOTES: ALL LEVELS SHOWN ON THE DRAWING ARE CHART DATUM LEVELS PROJECT LEVEL+0.000 = + 2.000 CHART DATUM.

For Panels distribution layout and Connection details Please Refer to drawing No. (JOH-ICD-S5-01-015-XXX-P1-SD-EL-011600)

DRAWING / DOCUMENT REFERENCE

NO.	NUMBER	TITLE	REV.
01	L24 & L25	JOH-HLA-S4-01-015-XXX-P1-DR-AR-011100	F00
02		JOH-BHC-S4-01-056-XXX-XX-DR-VT-015001	
03		JOH-BHC-S4-01-056-XXX-XX-DR-VT-010001	
04		JOH-BHC-S4-01-056-005-ZZ-DR-VT-013001	
05		JOH-BHC-S4-01-056-005-ZZ-DR-VT-011001	
06		TQ-OPE-MBL- JCDC-00952	
07		TQ-OPE-MBL-JCDC-00544	
08		TQ-OPE-MBL-JCDC-00222	
09		TQ-OPE-OTIS-MBL-0008	
10		TQ-OPE-OTIS-MBL-0010	

REVIEWED BY DISCIPLINE	SIGNATURE	DATE
ARCHITECTURAL	AR	2026-04-22
STRUCTURAL	PC	2026-04-22
MECHANICAL	SRA	2026-04-22
PLUMBING	[illegible]	[illegible]
ELECTRICAL	[illegible]	[illegible]
ICT	[illegible]	[illegible]
ADDITIONAL DISCIPLINES TO BE ADDED AS REQUIRED		

REV	DATE	BY	DESCRIPTION	CHK	APD
S01	16-APR-2026	AK	Shop drawing	DK	SS
S00	06-NOV-2025	AK	Issued for Approval	NA	SS

DRAWING STATUS: CONSTRUCTION SHOPDRAWING

CLIENT: شركة وسط جدة للتطوير Jeddah Central Development Co.

LEAD DESIGN CONSULTANTS: Henning Larsen

LEAD ENGINEERING CONSULTANT: BURO HAPPOLD

PROJECT SUPERVISION CONSULTANT: KHATIB & ALAMI

GENERAL CONTRACTOR: MBL

REVIEWER: dar

SUB CONTRACTOR: OTIS ELEVATOR COMPANY SAUDI ARABIA LIMITED

PROJECT: JEDDAH OPERA HOUSE

TITLE: CARPARK BUILDING
VERTICAL TRASNPORTATION
PART 002
PLANS - MAIN LOBBY LIFT SHAFT SHEET 01 OF 02 (L24 & L25)

SCALE @ A1:	CHECKED:	APPROVED:
1:25	Salma Sakr	Ali Basit


PROJECT No:	DESIGNED:	DRAWN:	DATE:
440014	Abdul Kafoor	Pranoti	06-NOV-2025

DRAWING No: JOH-OTS-S5-01-015-002-ZZ-SD-VT-011010 REV: S01

MODEL FILE REF: JOH-OTS-S5-01-015-XXX-ZZ-M3-VT-010001


© JCDC

CONTROLLER
-Intercom Data Point (By Main Contractor)
-BMS (By Main Contractor)
-EMS (By Main Contractor)
-CCTV (By Main Contractor)
-Fire (By Main Contractor)
-Cabin BGM Speakers
(By Main Contractor)

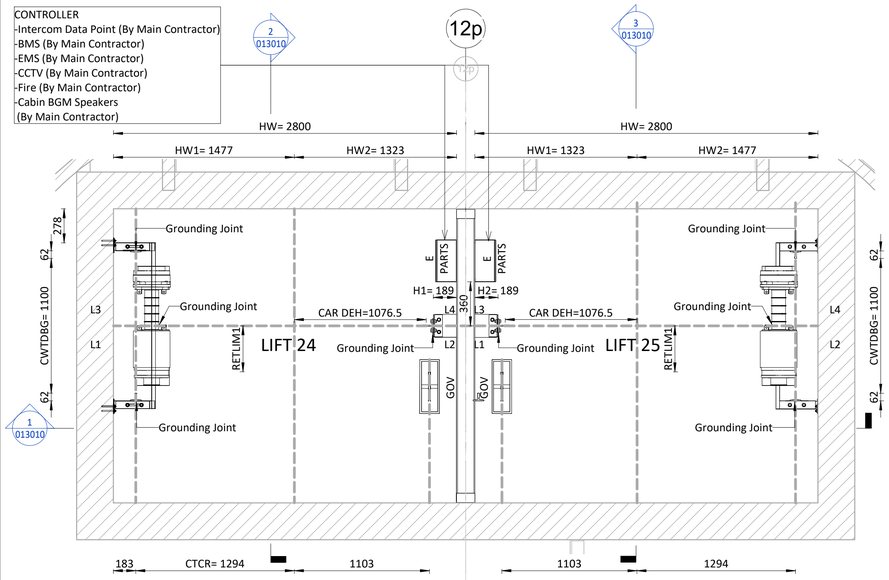


1 Machine Plan Level - ELEV-L24 & L25

1 : 25

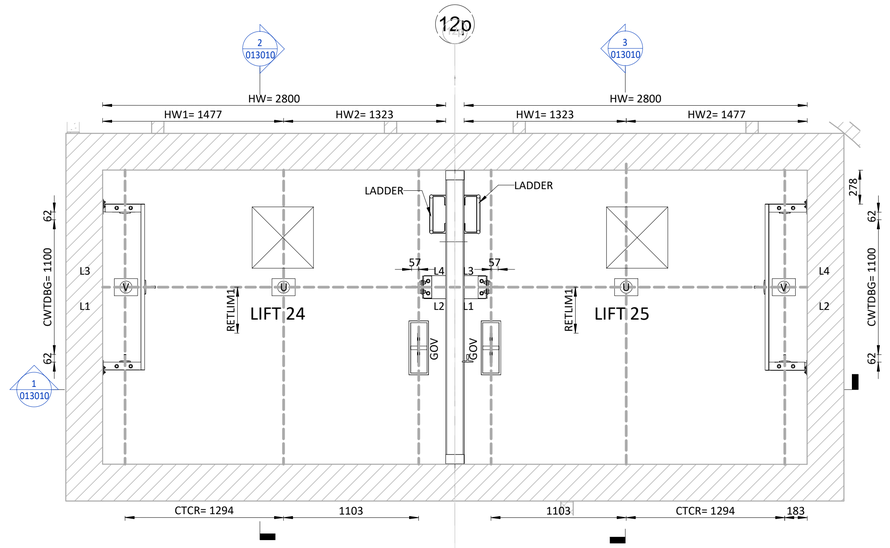

2 Top Hoist Way Pit Plan - ELEV-L24 & L25


1 : 25

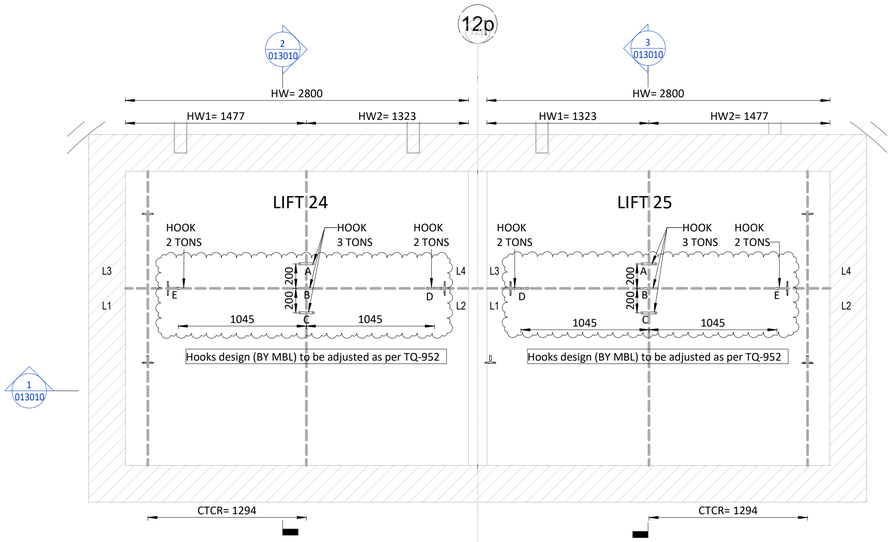


3 Top Hoist Way Hook Plan - ELEV-L24 & L25

1 : 25





KEY PLAN




KEY PLAN

GENERAL NOTES: ALL LEVELS SHOWN ON THE DRAWING ARE CHART DATUM LEVELS PROJECT LEVEL+0.000 = + 2.000 CHART DATUM.

For Panels distribution layout and Connection details Please Refer to drawing No. (JOH-ICD-S5-01-015-XXX-P1-SD-EL-011600)

ELEV-L24 & L25 ELEVATOR GENERAL SPECIFICATIONS	
LIFT NUMBER	ELEV.L24 & L25
CABIN INTERNAL SIZE(WXDXH)	2000X1700X2600
CAPACITY	1600 Kg
CLEAR ENTRACE	1200X2100
CONTROL	VVVF
CONTROL SYSTEM	DUPLEX DOWN COLLECTIVE
COUNTERWEIGHT SAFETY	NO
DOOR TYPE	CLD1
EMERGENCY EXITS	-
FRONT OPENING	2
HEAT RELEASE	1616Kcal/h
HOISTWAY SIZE(HWXHD)	2800X2400
LIFT NUMBER	ELV.L24 & 25
LIGHTING SUPPLY	220V 60HZ
MIN.FLOOR HEIGHT	3000
NO. OF FLOOR	2
NO. OF OPENINGS	2
NO. OF UNITS	2
NON-STOP FLOORS	-
NON-STOP FLOORS NAMES	-
NUMBER OF PASSENGERS	21P
OVERHEAD	4050mm
PIT DEPTH	1600mm
POWER SUPPLY	380V 3P 60HZ
PRODUCT NO.	GeN2 MRL
RATED CURRENT(A)	25.6
REAR OPENING	-
ROPING	2:1
SPEED(m/s)	1.00
START CURRENT(A)	28.4
SYSTEM POWER(KW)	13.5
TRAVEL	4500mm
USE	PASSENGER LIFT

REACTIONS FORCE (KN)			
Car side rail	CWT guide rail	Pit reaction	
R= 41	R= 15	U= 165	
R1= 2.47	R1= 1.13	V= 132	
R2= 3.14	R2= 0.3		



LEGEND	
HW	HOIST WAY WIDTH
HD	HOIST WAY DEPTH
CRH	CAR ROUGH HEIGHT
DOOR OP	DOOR OPENING
ROP	ROUGH OPENING
CW	CAR WIDTH
CD	CAR DEPTH
CH	CAR HEIGHT
DBG	DISTANCE BETWEEN GUARDRAIL
CWT	COUNTERWEIGHT
E&I PANEL	EMERGENCY & INSPECTION PANEL
G.O.V	CAR GOVERNOR
COP	CAR OPERATING PANEL
HBP	HALL POSITION INDICATOR

NOTE No.:
FRONT WALLS,FINISHES & ARCHITRAVES
TO BE BUILT (BY CLIENT) AFTER THE INSTALLATION OF
THE (LANDING) EXTERNAL DOORS.


IMPORTANT NOTE FOR MAIN CONTRACTOR.
FREEDOM OF ACCESS MUST BE AVAILABLE FOR POINT OF ENTRY INTO THE BUILDING UP TO THE ELEVATOR HOIST WAY AND THE FRONT WALLS OF THE HOIST WAY AT MAIN FLOOR TO BE LEFT OPEN FOR FULL WIDTH AND HEIGHT TO PERMIT ENTRY OF OUR EQUIPMENT.

CONTROLLED COPY
MBL IFC
QA/QC Department
MBL QA/QC
Engr. Mudassar Altaf

SCEC – K&A Reviewed
Civil Arch. Elec. ELV. Mech. Acoustic

SCEC – K&A Reviewed
Code B – Approved with Comments
(Do not Resubmit)

dar Checked and Reviewed
Refer to CRS : SD-OPE-MBL-JCDC-01481



DRAWING / DOCUMENT REFERENCE

NO.	NUMBER	TITLE	REV.
01	L24 & L25	JOH-HLA-S4-01-015-XXX-P1-DR-AR-011100	F00
02		JOH-BHC-S4-01-056-XXX-XX-DR-VT-015001	
03		JOH-BHC-S4-01-056-XXX-XX-DR-VT-010001	
04		JOH-BHC-S4-01-056-005-ZZ-DR-VT-013001	
05		JOH-BHC-S4-01-056-005-ZZ-DR-VT-011001	
06		TQ-OPE-MBL- JCDC-00952	
07		TQ-OPE-MBL-JCDC-00544	
08		TQ-OPE-MBL-JCDC-00222	
09		TQ-OPE-OTIS-MBL-0008	
10		TQ-OPE-OTIS-MBL-0010	

REVIEWED BY DISCIPLINE	SIGNATURE	DATE
ARCHITECTURAL		
STRUCTURAL		
MECHANICAL		
PLUMBING		
ELECTRICAL		
ICT		
ADDITIONAL DISCIPLINES TO BE ADDED AS REQUIRED		

REV	DATE	BY	DESCRIPTION	CHK	APD
S01	16-APR-2026	AK	Shop Drawing	NA	SS
S00	06-NOV-2025	AK	Issued for Approval	NA	SS

DRAWING STATUS: CONSTRUCTION SHOPDRAWING

CLIENT: شركة وسط جدة للتطوير Jeddah Central Development Co.

LEAD DESIGN CONSULTANTS: Henning Larsen

LEAD ENGINEERING CONSULTANT: BURO HAPPOLD

PROJECT SUPERVISION CONSULTANT: KHATIB & ALAMI

GENERAL CONTRACTOR: MBL

REVIEWER: dar

SUB CONTRACTOR: OTIS ELEVATOR COMPANY (SAUDI ARABIA) LIMITED — OTIS

PROJECT: JEDDAH OPERA HOUSE


TITLE: CARPARK BUILDING
VERTICAL TRASNPORTATION
PART 002
PLANS - MAIN LOBBY LIFT SHAFT SHEET 02 OF 02 (L24 & L25)

SCALE @ A1:	CHECKED:	APPROVED:
1:25	Salma Sakr	Ali Basit
PROJECT No: 440014	DESIGNED: Abdul Kafoor	DRAWN: Pranoti
		DATE: 16-APR-2026

DRAWING No: JOH-OTS-S5-01-015-002-ZZ-SD-VT-011011 REV: S01


MODEL FILE REF: JOH-OTS-S5-01-015-XXX-ZZ-M3-VT-010001

© JCDC

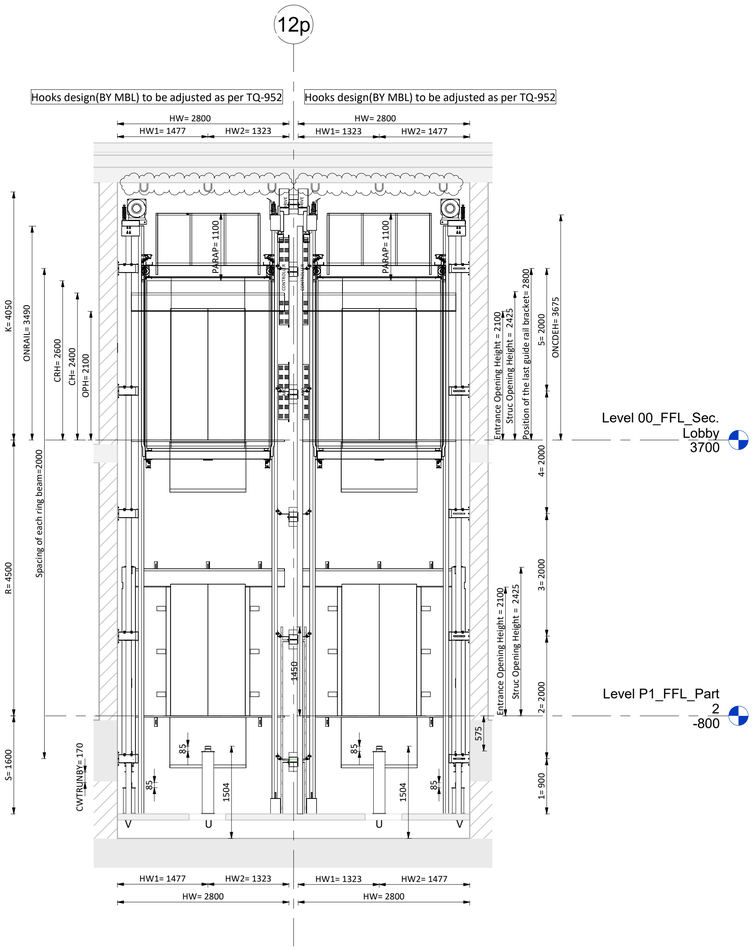


1 Section "A" - ELEV -L24 & L25

1 : 50

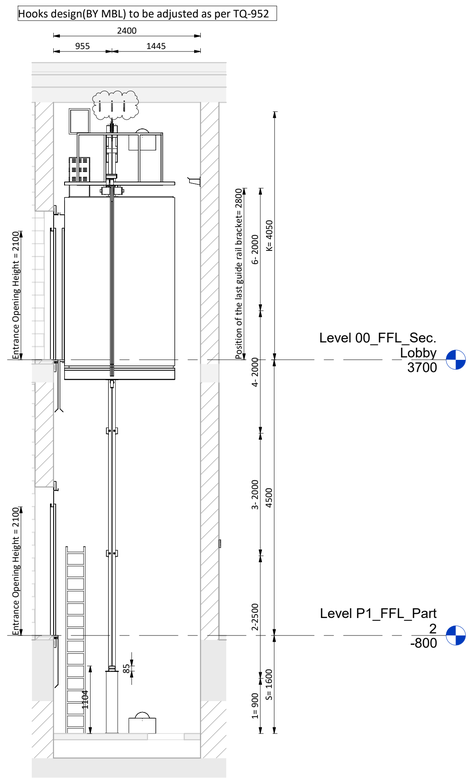


2 Section "B" - ELEV -L24

1 : 50

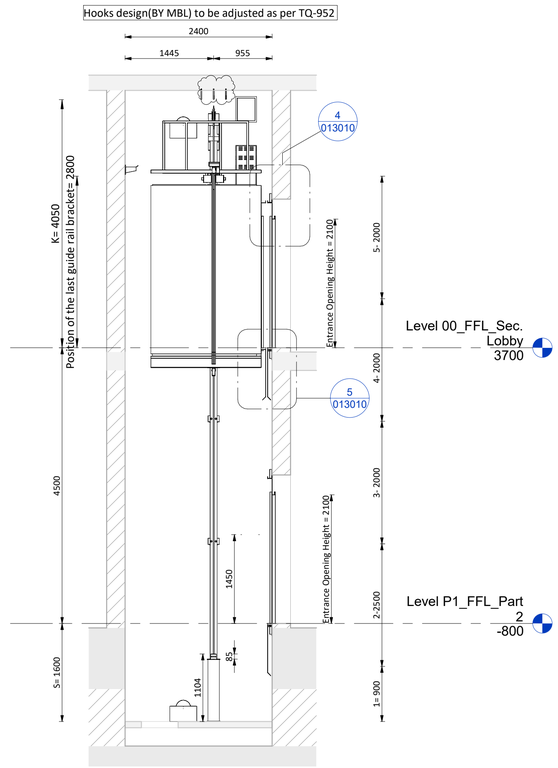


3 Section "B" - ELEV -L25

1 : 50

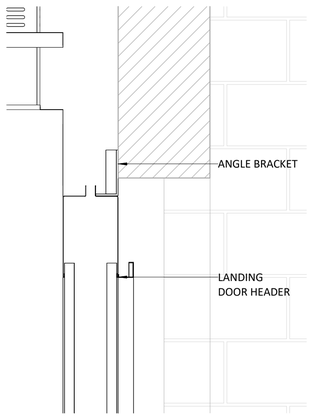


4 Landing Door Header Detail - ELEV-L24 & L25


1 : 10

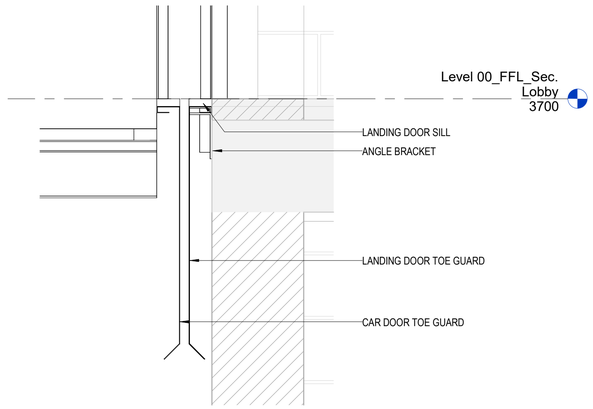

5 Landing Door Bottom Detail - ELEV-L24 & L25

1 : 10





KEY PLAN

GENERAL NOTES: ALL LEVELS SHOWN ON THE DRAWING ARE CHART DATUM LEVELS PROJECT LEVEL+0.000 = +2.000 CHART DATUM.

For Panels distribution layout and Connection details Please Refer to drawing No. (JOH-ICD-S5-01-015-XXX-P1-SD-EL-011600)

DRAWING / DOCUMENT REFERENCE

NO.	NUMBER	TITLE	REV.
01	L24 & L25	JOH-HLA-S4-01-015-XXX-P1-DR-AR-011100	F00
02		JOH-BHC-S4-01-056-XXX-XX-DR-VT-015001	
03		JOH-BHC-S4-01-056-XXX-XX-DR-VT-010001	
04		JOH-BHC-S4-01-056-005-ZZ-DR-VT-013001	
05		JOH-BHC-S4-01-056-005-ZZ-DR-VT-011001	
06		TQ-OPE-MBL- JCDC-00952	
07		TQ-OPE-MBL-JCDC-00544	
08		TQ-OPE-MBL-JCDC-00222	
09		TQ-OPE-OTIS-MBL-0008	
10		TQ-OPE-OTIS-MBL-0010	

REVIEWED BY DISCIPLINE	SIGNATURE	DATE
ARCHITECTURAL	[redacted]	
STRUCTURAL	[redacted]	
MECHANICAL	[redacted]	
PLUMBING	[redacted]	
ELECTRICAL	[redacted]	
ICT	[redacted]	
ADDITIONAL DISCIPLINES TO BE ADDED AS REQUIRED		

REV	DATE	BY	DESCRIPTION	CHK	APD
S01	16-APR-2026	AK	Shop drawing	DK	SS
S00	06-NOV-2025	AK	Issued for Approval	NA	SS

DRAWING STATUS: CONSTRUCTION SHOPDRAWING

CLIENT: شركة وسط جدة للتطوير Jeddah Central Development Co.

LEAD DESIGN CONSULTANTS: Henning Larsen

LEAD ENGINEERING CONSULTANT: BURO HAPPOLD

PROJECT SUPERVISION CONSULTANT: KHATIB & ALAMI

GENERAL CONTRACTOR: MBL

REVIEWER: dar

SUB CONTRACTOR: OTIS ELEVATOR COMPANY (SAUDI ARABIA) LIMITED — OTIS

PROJECT: JEDDAH OPERA HOUSE

TITLE: CARPARK BUILDING
VERTICAL TRASNPORTATION
PART 002
SECTIONS - MAIN LOBBY LIFT SHAFT S (L24 & L25)

SCALE @ A1:	CHECKED:	APPROVED:
As indicated	Salma Sakr	Ali Basit
PROJECT No:	DESIGNED: / DRAWN:	DATE:
440014	Abdul Kafoor / Pranoti	06-NOV-2025

DRAWING No: JOH-OTS-S5-01-015-002-ZZ-SD-VT-013010 REV: S01

MODEL FILE REF: JOH-OTS-S5-01-015-XXX-ZZ-M3-VT-010001

© JCDC

SCEC – K&A Reviewed
Civil ☐ Arch. ☐ Elec. ☒ ELV. ☐ Mech. ☒ Acoustic ☒

CONTROLLED COPY
MBL IFC
QA/QC Department
MBL QAM
Engr. Mudassar Altaf

SCEC – K&A Reviewed
Code B – Approved with Comments
(Do not Resubmit)

dar
Refer to CRS - SD-OPE-MBL-JCDC-01481