

Lift 26

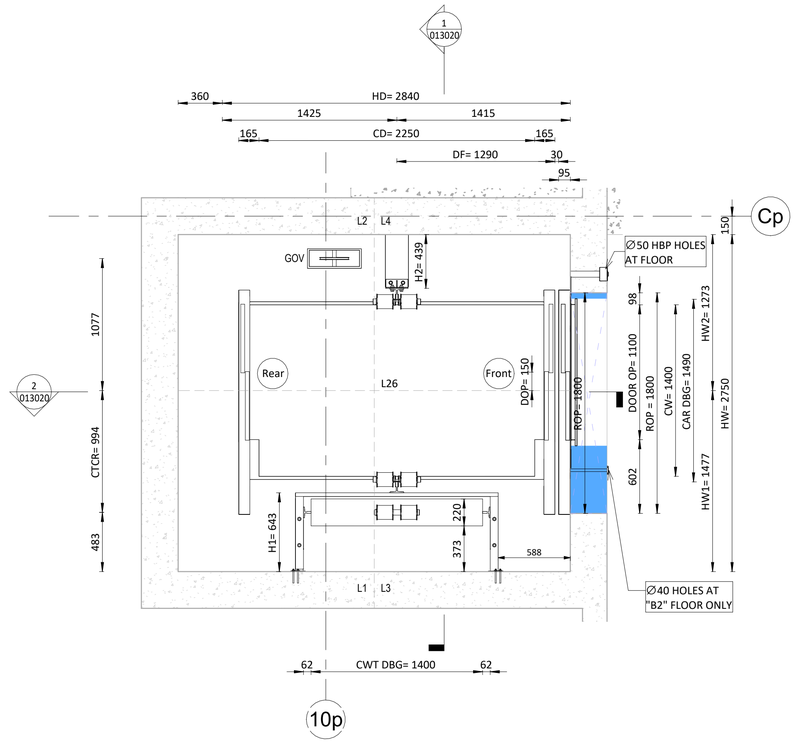


1 Hoist Way Plan At "P1" Floor (FRONT) - ELEV-L26


1 : 25

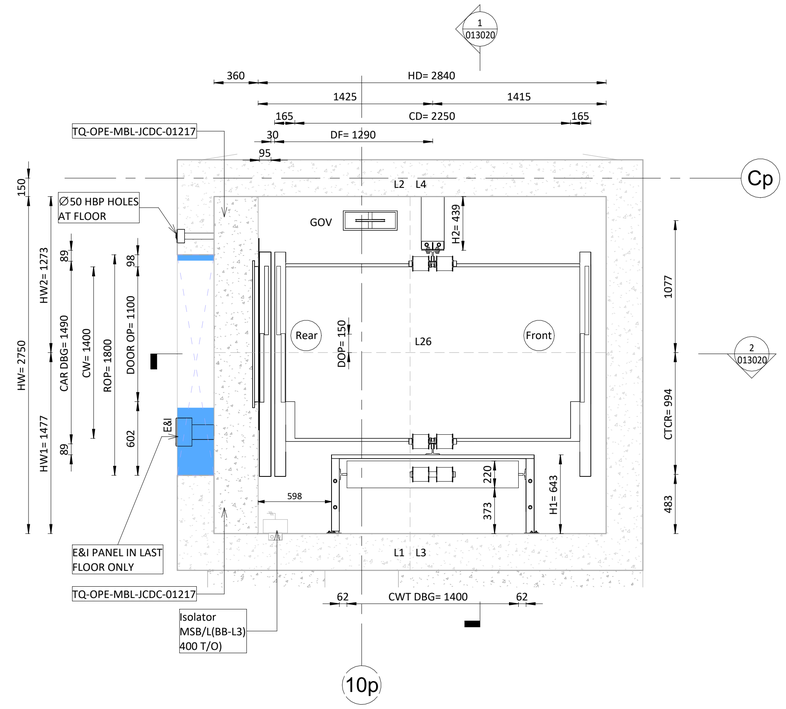


2 Hoist Way Plan At "00" Floor (REAR) - ELEV-L26

1 : 25





KEY PLAN



KEY PLAN

GENERAL NOTES: ALL LEVELS SHOWN ON THE DRAWING ARE CHART DATUM LEVELS PROJECT LEVEL+0.000 = +2.00 CHART DATUM.

Notes:
- All shop drawings have been extracted from the BIM federated model.
- The Contractor will carry out a site survey prior to execution.
- All levels indicated have been taken from the federated model.
- All car dimensions are in accordance with the approved TBE.
- Car interior finishes will be submitted under a separate submittal.
- No hoist-way pressurization is required for the Opera Building.
- Ladder specification:
  - * Type: Folding ladder (with a switch to protect the maintenance in the pit)
  - * Material: Q235 tube (welding and painted yellow)
  - * Length: About 1100mm above bottom landing
  - * Note: the ladder will be divided into two parts to deliver

ELEV-L26 ELEVATOR GENERAL SPECIFICATIONS	
LIFT NUMBER	ELEV.L26
CABIN INTERNAL SIZE(WXDXH)	1400X2250X2600
CAPACITY	1600 Kg
CLEAR ENTRANCE	1100X2000
CONTROL	VVVF
CONTROL SYSTEM	SIMPLEX DOWN COLLECTIVE
COUNTERWEIGHT SAFETY	NO
DOOR TYPE	TLD2
EMERGENCY EXITS	-
FRONT OPENING	1
HEAT RELEASE	1616Kcal/h
HOISTWAY SIZE(HWXHD)	2750X2840
LIFT NUMBER	ELV.L26
LIGHTING SUPPLY	220V 60HZ
MIN.FLOOR HEIGHT	2700
NO. OF FLOOR	2
NO. OF OPENINGS	2
NO. OF UNITS	1
NON-STOP FLOORS	-
NON-STOP FLOORS NAMES	-
NUMBER OF PASSENGERS	21P
OVERHEAD	4050 mm
PIT DEPTH	1600 mm
POWER SUPPLY	380V 3P 60HZ
PRODUCT NO.	GeN2 MRL
RATED CURRENT(A)	25.6
REAR OPENING	1
ROPING	2:1
SPEED(m/s)	1.00
START CURRENT(A)	28.4
SYSTEM POWER(KW)	13.5
TRAVEL	5000 mm
USE	TECHNICAL LIFT

REACTIONS FORCE (KN)			
Car side rail	CWT guide rail	Pit reaction	
R= 41	R= 15	U= 165	R, R2, R1, R2
R1= 2.47	R1= 1.13	V= 132	
R2= 3.14	R2= 0.3		

LEGEND	
HW	HOIST WAY WIDTH
HD	HOIST WAY DEPTH
CRH	CAR ROUGH HEIGHT
DOOR OP	DOOR OPENING
ROP	ROUGH OPENING
CW	CAR WIDTH
CD	CAR DEPTH
CH	CAR HEIGHT
DBG	DISTANCE BETWEEN GUARDRAIL
CWT	COUNTERWEIGHT
E&I PANEL	EMERGENCY & INSPECTION PANEL
G.O.V	CAR GOVERNOR
COP	CAR OPERATING PANEL
HBP	HALL POSITION INDICATOR

NOTE No.:
FRONT WALLS,FINISHES & ARCHITRAVES TO BE BUILT (BY MBL/FOH/BOH) AFTER THE INSTALLATION OF THE (LANDING) EXTERNAL DOORS.


IMPORTANT NOTE FOR MAIN CONTRACTOR.
FREEDOM OF ACCESS MUST BE AVAILABLE FOR POINT OF ENTRY INTO THE BUILDING UP TO THE ELEVATOR HOIST WAY AND THE FRONT WALLS OF THE HOIST WAY AT MAIN FLOOR TO BE LEFT OPEN FOR FULL WIDTH AND HEIGHT TO PERMIT ENTRY OF OUR EQUIPMENT.

CONTROLLED COPY
MBL IFC
JEDDAH OPERA HOUSE PROJECT
QA/QC Department
MBL QAM
Engr. Mudassar Altaf

SCEC – K&A Reviewed
Civil Arch. Elec. ELV. Mech. Acoustic

SCEC – K&A Reviewed
Code B – Approved with Comments
(Do not Resubmit)

Checked and Reviewed



DRAWING / DOCUMENT REFERENCE

NO.	NUMBER	TITLE	REV.
01	L26	JOH-HLA-S4-01-015-XXX-P1-DR-AR-011100	F00
02		JOH-BHC-S4-01-056-XXX-XX-DR-VT-015001	
03		JOH-BHC-S4-01-056-XXX-XX-DR-VT-010001	
04		TQ-OPE-MBL-JCDC-00222	
05		TQ-OPE-OTIS-MBL-0008	
06		TQ-OPE-OTIS-MBL-0010	
07		TQ-OPE-MBL-JCDC-01217	
08		JCD-OPE-MBL-PRO-MTS-005-02	
ELE Panels distribution layout		JOH-KCD-S5-01-015-XXX-P1-SD-EL-011600	
		Attached : wiring diagram	

REVIEWED BY DISCIPLINE	SIGNATURE	DATE
ARCHITECTURAL	MT	2026-07-02
STRUCTURAL	PC	2026-07-02
MECHANICAL	SI-A	2026-07-02
PLUMBING	SI-A	2026-07-02
ELECTRICAL	SI-A	2026-07-02
ICT	SI-A	2026-07-02
ADDITIONAL DISCIPLINES TO BE ADDED AS REQUIRED		

REV	DATE	BY	DESCRIPTION	CHK	APD
S00	24-JUNE-2026	AK	Issued for Approval	NA	SS

DRAWING STATUS:
CONSTRUCTION SHOPDRAWING

CLIENT:

LEAD DESIGN CONSULTANTS: Henning Larsen

LEAD ENGINEERING CONSULTANT: BURO HAPPOLD

PROJECT SUPERVISION CONSULTANT:

GENERAL CONTRACTOR:

REVIEWER: dar

SUB CONTRACTOR: OTIS

PROJECT
JEDDAH OPERA HOUSE

TITLE:
CARPARK BUILDING
VERTICAL TRASNPORTATION
PART 002
PLANS-SECONDARY LOBBY LIFT SHAFT SHEET 01OF02(L26)


SCALE @ A1:	CHECKED:	APPROVED:
As indicated	SS	AB

PROJECT No:	DESIGNED:	DRAWN:	DATE:
440014	AK	PR	24-JUNE-2026

DRAWING No: JOH-OTS-S5-01-015-002-ZZ-SD-VT-011020 REV: S00


MODEL FILE REF:
JOH-OTS-S5-01-015-XXX-ZZ-M3-VT-010001

© JCDC

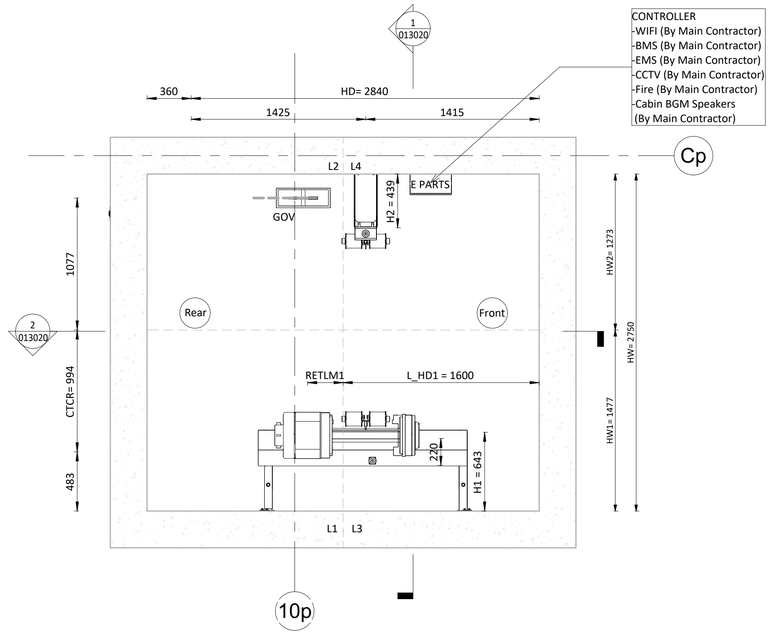


1 Machine Plan Level - ELEV-L26

1 : 25

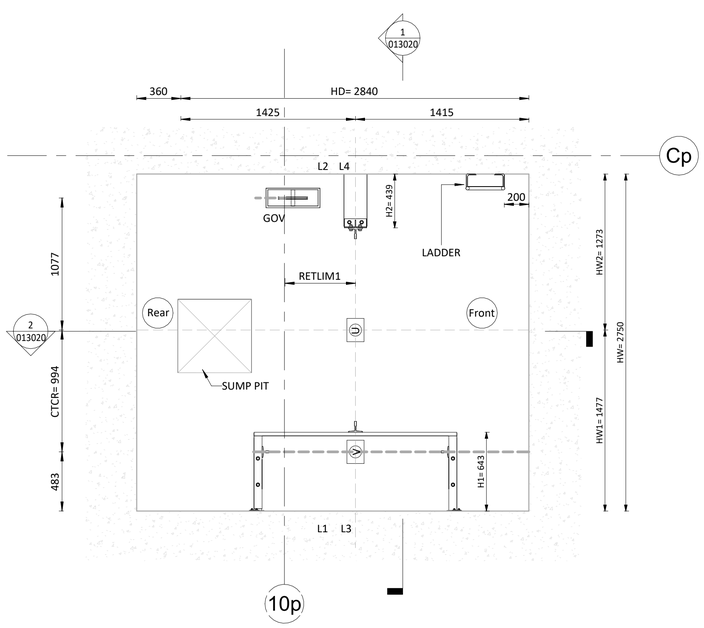

2 Top Hoist Way Pit Plan - ELEV-L26

1 : 25

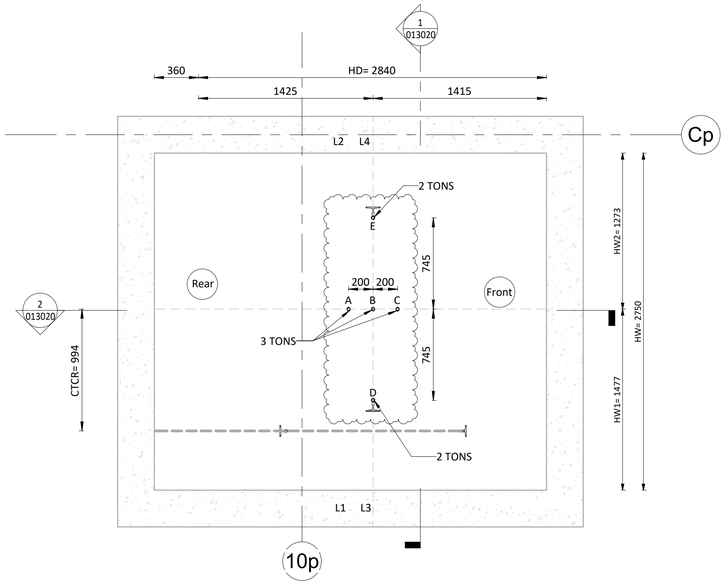

HOOKS TO BE PROVIDED BY MBL AS PER (JCD-OPE-MBL-PRO-MTS-005-02)
HD-Socket Anchor / Bartec lifting socket

3 Top Hoist Way Hook Plan - ELEV-L26


1 : 25

CONTROLLED COPY
MBL IFC
JEDDAH OPERA HOUSE PROJECT
QA/QC Department
MBL QAM
Engr. Mudassar Altaf

SCEC – K&A Reviewed


Civil	Arch.	Elec.	ELV.	Mech.	Acoustic
☒	☒	☒	☐	☒	☒

SCEC – K&A Reviewed
Code B – Approved with Comments
(Do not Resubmit)




Checked and Reviewed





KEY PLAN



KEY PLAN

GENERAL NOTES: ALL LEVELS SHOWN ON THE DRAWING ARE CHART DATUM LEVELS PROJECT LEVEL+0.000 = +2.00 CHART DATUM.

Notes:
- All shop drawings have been extracted from the BIM federated model.
- The Contractor will carry out a site survey prior to execution.
- All levels indicated have been taken from the federated model.
- All car dimensions are in accordance with the approved TBE.
- Car interior finishes will be submitted under a separate submittal.
- No hoist-way pressurization is required for the Opera Building.
- Ladder specification:
  - Type: Folding ladder (with a switch to protect the maintenance in the pit)
  - Material: Q235 tube (welding and painted yellow)
  - Length: About 1100mm above bottom landing
  - Note: the ladder will be divided into two parts to deliver

ELEV-L26 ELEVATOR GENERAL SPECIFICATIONS	
LIFT NUMBER	ELEV.L26
CABIN INTERNAL SIZE(WXDXH)	1400X2250X2600
CAPACITY	1600 Kg
CLEAR ENTRANCE	1100X2000
CONTROL	VVVF
CONTROL SYSTEM	SIMPLEX DOWN COLLECTIVE
COUNTERWEIGHT SAFETY	NO
DOOR TYPE	TLD2
EMERGENCY EXITS	-
FRONT OPENING	1
HEAT RELEASE	1616Kcal/h
HOISTWAY SIZE(HWXHD)	2750X2840
LIFT NUMBER	ELV.L26
LIGHTING SUPPLY	220V 60HZ
MIN.FLOOR HEIGHT	2700
NO. OF FLOOR	2
NO. OF OPENINGS	2
NO. OF UNITS	1
NON-STOP FLOORS	-
NON-STOP FLOORS NAMES	-
NUMBER OF PASSENGERS	21P
OVERHEAD	4050 mm
PIT DEPTH	1600 mm
POWER SUPPLY	380V 3P 60HZ
PRODUCT NO.	GeN2 MRL
RATED CURRENT(A)	25.6
REAR OPENING	1
ROPING	2:1
SPEED(m/s)	1.00
START CURRENT(A)	28.4
SYSTEM POWER(KW)	13.5
TRAVEL	5000 mm
USE	TECHNICAL LIFT

REACTIONS FORCE (KN)			
Car side rail	CWT guide rail	Pit reaction	
R= 41	R= 15	U= 165	
R1= 2.47	R1= 1.13	V= 132	
R2= 3.14	R2= 0.3		

LEGEND	
HW	HOIST WAY WIDTH
HD	HOIST WAY DEPTH
CRH	CAR ROUGH HEIGHT
DOOR OP	DOOR OPENING
ROP	ROUGH OPENING
CW	CAR WIDTH
CD	CAR DEPTH
CH	CAR HEIGHT
DBG	DISTANCE BETWEEN GUARDRAIL
CWT	COUNTERWEIGHT
E&I PANEL	EMERGENCY & INSPECTION PANEL
G.O.V	CAR GOVERNOR
COP	CAR OPERATING PANEL
HBP	HALL POSITION INDICATOR

NOTE No.:
FRONT WALLS,FINISHES & ARCHITRAVES
TO BE BUILT (BY MBL/FOH/BOH) AFTER THE INSTALLATION OF THE (LANDING) EXTERNAL DOORS.

IMPORTANT NOTE FOR MAIN CONTRACTOR.
FREEDOM OF ACCESS MUST BE AVAILABLE FOR POINT OF ENTRY INTO THE BUILDING UP TO THE ELEVATOR HOIST WAY AND THE FRONT WALLS OF THE HOIST WAY AT MAIN FLOOR TO BE LEFT OPEN FOR FULL WIDTH AND HEIGHT TO PERMIT ENTRY OF OUR EQUIPMENT.

DRAWING / DOCUMENT REFERENCE

NO.	NUMBER	TITLE	REV.
01	L26	JOH-HLA-S4-01-015-XXX-P1-DR-AR-011100	F00
02		JOH-BHC-S4-01-056-XXX-XX-DR-VT-015001	
03		JOH-BHC-S4-01-056-XXX-XX-DR-VT-010001	
04		TQ-OPE-MBL-JCDC-00222	
05		TQ-OPE-OTIS-MBL-0008	
06		TQ-OPE-OTIS-MBL-0010	
07		TQ-OPE-MBL-JCDC-01217	
08		JCD-OPE-MBL-PRO-MTS-005-02	
ELE Panels distribution layout		JOH-ICD-SS-01-015-XXX-P1-SD-EL-011600	
		Attached : wiring diagram	

REVIEWED BY DISCIPLINE	SIGNATURE	DATE
ARCHITECTURAL	MT	2026-07-02
STRUCTURAL	PC	2026-07-02
MECHANICAL	Sh.A	2026-07-02
PLUMBING	Sh.A	2026-07-02
ELECTRICAL	Sh.A	2026-07-02
ICT	Sh.A	2026-07-02
ADDITIONAL DISCIPLINES TO BE ADDED AS REQUIRED		

REV	DATE	BY	DESCRIPTION	CHK	APD
S00	24-JUNE-2026	AK	Issued for Approval	NA	SS

DRAWING STATUS:
CONSTRUCTION SHOPDRAWING

CLIENT:

LEAD DESIGN CONSULTANTS: Henning Larsen

LEAD ENGINEERING CONSULTANT: BURO HAPPOLD

PROJECT SUPERVISION CONSULTANT:

GENERAL CONTRACTOR:

REVIEWER: dar

SUB CONTRACTOR: OTIS

PROJECT
JEDDAH OPERA HOUSE

TITLE:
CARPARK BUILDING
VERTICAL TRASNPORTATION
PART 002
PLANS-SECONDARY LOBBY LIFT SHAFT SHEET02 OF 02(L26)


SCALE @ A1:	CHECKED:	APPROVED:
As indicated	SS	AB

PROJECT No:	DESIGNED:	DRAWN:	DATE:
440014	AK	PR	24-JUNE-2026

DRAWING No: JOH-OTS-S5-01-015-002-ZZ-SD-VT-011021 REV: S00


MODEL FILE REF: JOH-OTS-S5-01-015-XXX-ZZ-M3-VT-010001

© JCDC

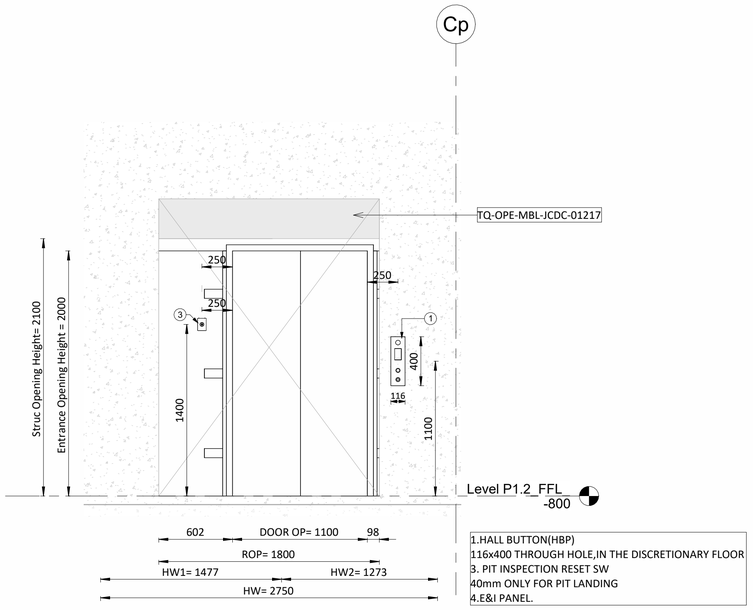

1 Door Elevation At "P1" Floor (FRONT) - ELEV-L26


1 : 25

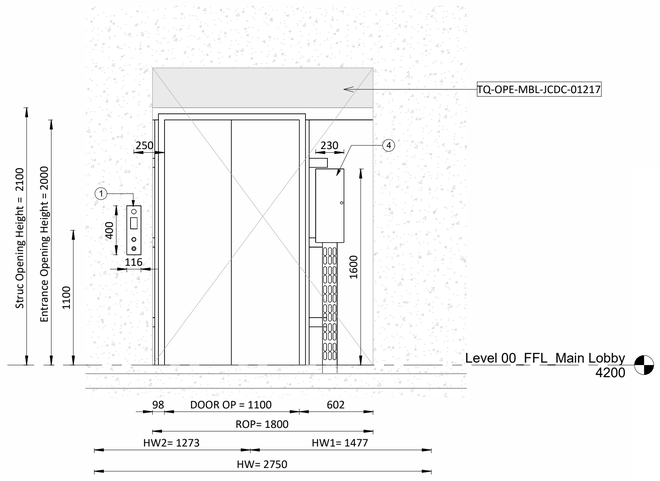

2 Door Elevation At "00" Floor (REAR) - ELEV-L26


1 : 25

Simplex Units




PUSH BUTTON

(a) FACE PLATE:116(L)x 400 (w)
(b) CONCRETE OPENING: 105 (L) x 386 (w) X 62 (D)
(c) FINISHING OPENING: 105 (L)x 385(w)
(d) Back BOX: 104(L) X 384(W) x 60(D)

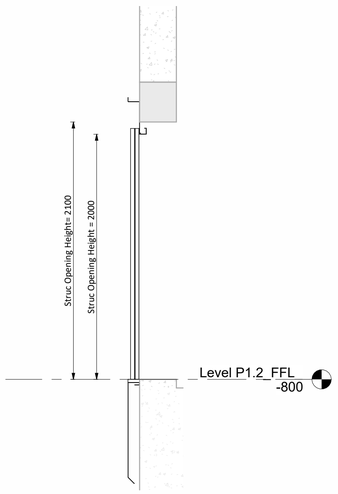


3 Cross-Section View A-A - ELEV-L26

1 : 25

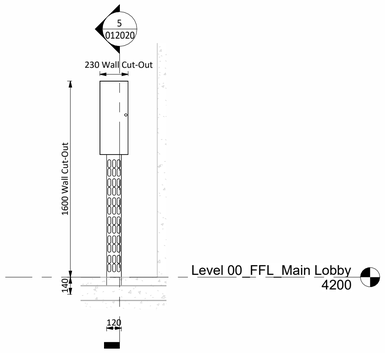

4 E&I SPOT DETAIL - ELEV-L26

1 : 25




5 Cross-Section View B-B - ELEV-L26

1 : 25

CONTROLLED COPY
MBL IFC
JEDDAH OPERA HOUSE PROJECT
QA/QC Department
MBL QAM
Engr. Mudassar Altaf

SCEC – K&A Reviewed
Civil | Arch. | Elec. | ELV. | Mech. | Acoustic


SCEC – K&A Reviewed
Code B – Approved with Comments
(Do not Resubmit)



Protection Elevation Detail
At Each Elevator Shaft Opening

LEGEND	
HW	HOIST WAY WIDTH
HD	HOIST WAY DEPTH
CRH	CAR ROUGH HEIGHT
DOOR OP	DOOR OPENING
ROP	ROUGH OPENING
CW	CAR WIDTH
CD	CAR DEPTH
CH	CAR HEIGHT
DBG	DISTANCE BETWEEN GUARDRAIL
CWT	COUNTERWEIGHT
E&I PANEL	EMERGENCY & INSPECTION PANEL
G.O.V	CAR GOVERNOR
COP	CAR OPERATING PANEL
HBP	HALL POSITION INDICATOR

dar Dar Al Handasah consultants (Shair and Partners)
Checked and Reviewed



KEY PLAN

GENERAL NOTES: ALL LEVELS SHOWN ON THE DRAWING ARE CHART DATUM LEVELS PROJECT LEVEL+0.000 = +2.00 CHART DATUM.

Notes:
- All shop drawings have been extracted from the BIM federated model.
- The Contractor will carry out a site survey prior to execution.
- All levels indicated have been taken from the federated model.
- All car dimensions are in accordance with the approved TBE.
- Car interior finishes will be submitted under a separate submittal.
- No hoist-way pressurization is required for the Opera Building.
- Ladder specification:
  - Type: Folding ladder (with a switch to protect the maintenance in the pit)
  - Material: Q235 tube (welding and painted yellow)
  - Length: About 1100mm above bottom landing
  - Note: the ladder will be divided into two parts to deliver

DRAWING / DOCUMENT REFERENCE

NO.	NUMBER	TITLE	REV.
01	L26	JOH-HLA-S4-01-015-XXX-P1-DR-AR-011100	F00
02		JOH-BHC-S4-01-056-XXX-XX-DR-VT-015001	
03		JOH-BHC-S4-01-056-XXX-XX-DR-VT-010001	
04		TQ-OPE-MBL-JCDC-00222	
05		TQ-OPE-OTIS-MBL-0008	
06		TQ-OPE-OTIS-MBL-0010	
07		TQ-OPE-MBL-JCDC-01217	
08		JCD-OPE-MBL-PRO-MTS-005-02	
ELE Panels distribution layout		JOH-ICD-S5-01-015-XXX-P1-SD-EL-011600	
		Attached : wiring diagram	

REVIEWED BY DISCIPLINE	SIGNATURE	DATE
ARCHITECTURAL	MT	2026-07-02
STRUCTURAL	PC	2026-07-02
MECHANICAL	SI.A	2026-07-02
PLUMBING	SI.A	2026-07-02
ELECTRICAL	SI.A	2026-07-02
ICT	SI.A	2026-07-02
ADDITIONAL DISCIPLINES TO BE ADDED AS REQUIRED		

REV	DATE	BY	DESCRIPTION	CHK	APD
S00	24-JUNE-2026	AK	Issued for Approval	NA	SS

DRAWING STATUS: CONSTRUCTION SHOPDRAWING

CLIENT:

LEAD DESIGN CONSULTANTS: Henning Larsen

LEAD ENGINEERING CONSULTANT: BURO HAPPOLD

PROJECT SUPERVISION CONSULTANT:

GENERAL CONTRACTOR:

REVIEWER: dar

SUB CONTRACTOR: OTIS

PROJECT: JEDDAH OPERA HOUSE


TITLE: CARPARK BUILDING
VERTICAL TRASNPORTATION
PART 002
ELEVATIONS - SECONDARY LOBBY LIFT SHAFT (L26)

SCALE @ A1:	CHECKED:		APPROVED:
As indicated	SS		AB
PROJECT No:	DESIGNED:	DRAWN:	DATE:
440014	AK	PR	24-JUNE-2026


DRAWING No: JOH-OTS-S5-01-015-002-ZZ-SD-VT-012020 REV: S00

MODEL FILE REF: JOH-OTS-S5-01-015-XXX-ZZ-M3-VT-010001


© JCDC

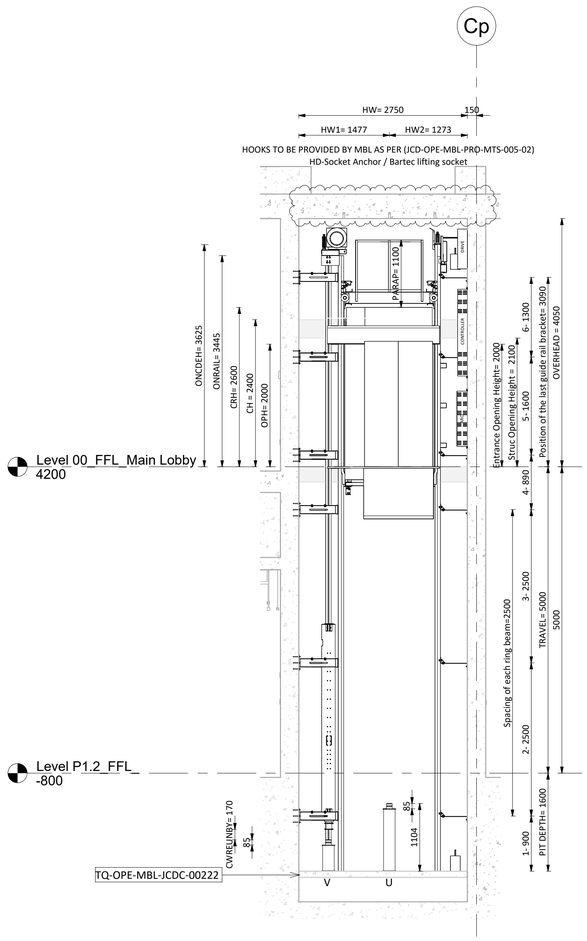


1 Section "A" - ELEV -L26
1 : 50

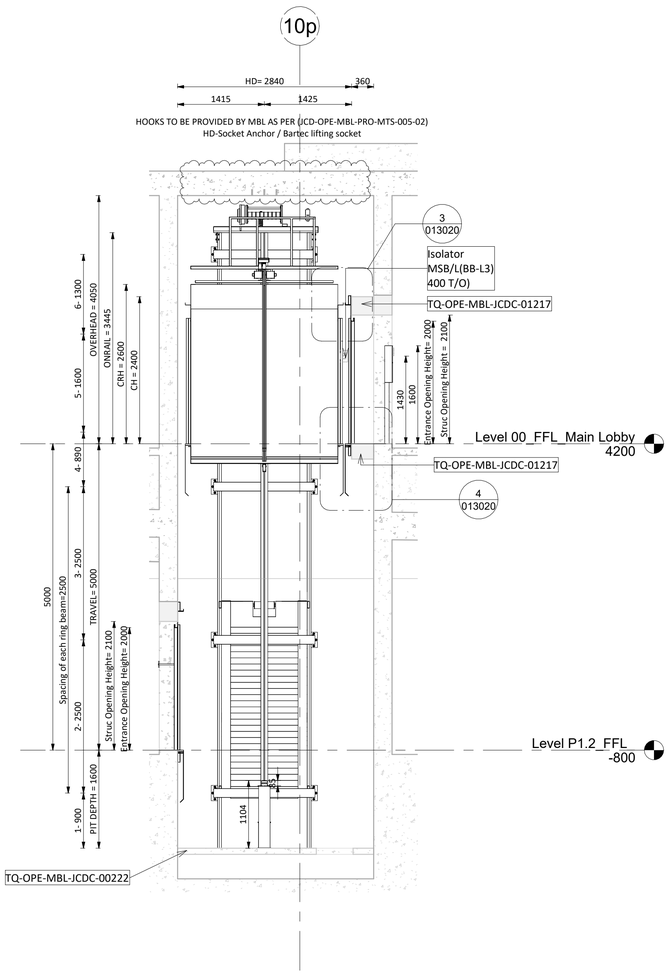

2 Section "B" - ELEV -L26
1 : 50

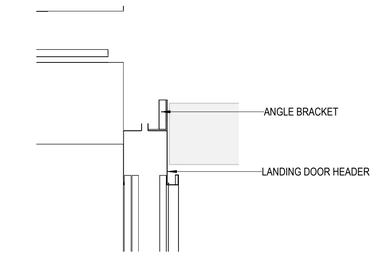

3 Landing Door Header Detail - ELEV-L26
1 : 15

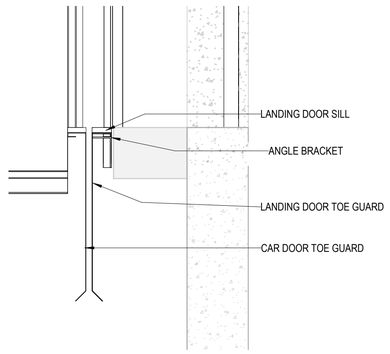

4 Landing Door Bottom Detail - ELEV-L26
1 : 15


CONTROLLED COPY
MBL IFC
JEDDAH OPERA HOUSE PROJECT
QA/QC Department
MBL QAM
Engr. Mudassar Altaf

SCEC – K&A Reviewed

	Civil	Arch.	Elec.	ELV.	Mech.	Acoustic
	☒	☒	☒	☐	☒	☒

SCEC – K&A Reviewed
Code B – Approved with Comments
(Do not Resubmit)

dar Dar Al-Handasah consultants (Shair and Partners)
Checked and Reviewed



KEY PLAN

GENERAL NOTES: ALL LEVELS SHOWN ON THE DRAWING ARE CHART DATUM LEVELS PROJECT LEVEL+0.000 = +2.00 CHART DATUM.

Notes:
- All shop drawings have been extracted from the BIM federated model.
- The Contractor will carry out a site survey prior to execution.
- All levels indicated have been taken from the federated model.
- All car dimensions are in accordance with the approved TBE.
- Car interior finishes will be submitted under a separate submittal.
- No hoist-way pressurization is required for the Opera Building.
- Ladder specification:
  - * Type: Folding ladder (with a switch to protect the maintenance in the pit)
  - * Material: Q235 tube (welding and painted yellow)
  - * Length: About 1100mm above bottom landing
  - * Note: the ladder will be divided into two parts to deliver

DRAWING / DOCUMENT REFERENCE

NO.	NUMBER	TITLE	REV.
01	L26	JOH-HLA-S4-01-015-XXX-P1-DR-AR-011100	F00
02		JOH-BHC-S4-01-056-XXX-XX-DR-VT-015001	
03		JOH-BHC-S4-01-056-XXX-XX-DR-VT-010001	
04		TQ-OPE-MBL-JCDC-00222	
05		TQ-OPE-OTIS-MBL-0008	
06		TQ-OPE-OTIS-MBL-0010	
07		TQ-OPE-MBL-JCDC-01217	
08		JCD-OPE-MBL-PRO-MTS-005-02	
ELE Panels distribution layout		JOH-ICD-S5-01-015-XXX-P1-SD-EL-011600	
		Attached : wiring diagram	

REVIEWED BY DISCIPLINE	SIGNATURE	DATE
ARCHITECTURAL	MT	2026-07-02
STRUCTURAL	PC	2026-07-02
MECHANICAL	Sh.A	2026-07-02
PLUMBING	Sh.A	2026-07-02
ELECTRICAL	Sh.A	2026-07-02
ICT	Sh.A	2026-07-02
ADDITIONAL DISCIPLINES TO BE ADDED AS REQUIRED		

REV	DATE	BY	DESCRIPTION	CHK	APD
S00	24-JUNE-2026	AK	Issued for Approval	NA	SS

DRAWING STATUS: CONSTRUCTION SHOPDRAWING

CLIENT:

LEAD DESIGN CONSULTANTS: Henning Larsen

LEAD ENGINEERING CONSULTANT: BURO HAPPOLD

PROJECT SUPERVISION CONSULTANT:

GENERAL CONTRACTOR:

REVIEWER: dar

SUB CONTRACTOR: OTIS

PROJECT: JEDDAH OPERA HOUSE

TITLE: CARPARK BUILDING
VERTICAL TRASNPORTATION
PART 002
SECTIONS - SECONDARY LOBBY LIFT SHAFT (L26)

SCALE @ A1:	CHECKED:		APPROVED:
As indicated	SS		AB
PROJECT No:	DESIGNED:	DRAWN:	DATE:
440014	AK	PR	24-JUNE-2026

DRAWING No: JOH-OTS-S5-01-015-002-ZZ-SD-VT-013020 REV: S00

MODEL FILE REF: JOH-OTS-S5-01-015-XXX-ZZ-M3-VT-010001

© JCDC